

EMEA Region

[Download Instructions \(multilingual\)](#)

## Base Charger

### ECONOMICAL



- Most affordable Energizer® charger

### EASY TO USE




- Lights indicate batteries are charging

### CONVENIENT



- Charges 2 or 4 NiMH batteries

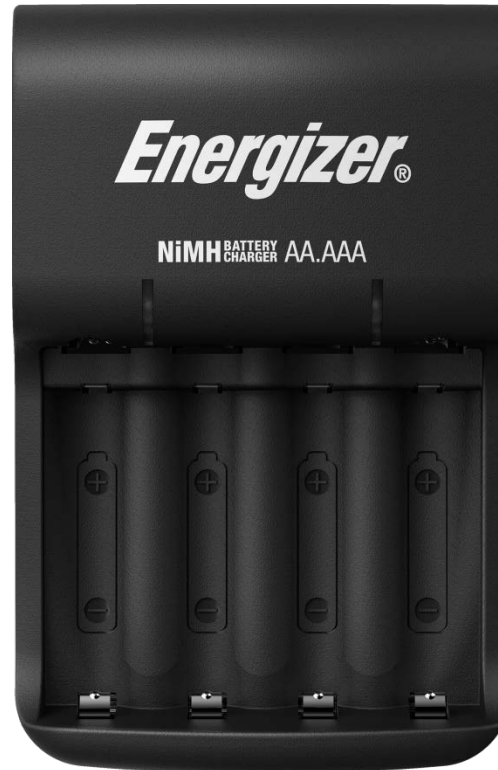

#### Before Using Your Charger:

Please read all instructions and cautionary markings on the battery charger, batteries, and device.

Best used with *Energizer®* NiMH batteries.

### Product Detail:

**Designation:** Base Charger

**Model:** CHVC4

**Color:** Black

**Charge Capability:** "AA" (2) or (4) / "AAA" (2) or (4)  
"AA" (2) and "AAA" (2) Simultaneously

**Note:** When charging only 2 batteries, place batteries in the two positions to the left or right.

Charging Times: (estimated)	Battery	Capacity	Estimated
	(NiMH)	(mAh)	(time)
	AA	1300-2000	8-11 hrs
	AA	2000-2400	11-13 hrs
	AAA	500-800	7-10 hrs

**Shutoff Mechanism:** None

**Charging Current:** "AA" 200mA  
"AAA" 100mA

**Trickle Charge:** None

**Input Rating:** 220V-240VAC, 50/60Hz, 6W

**Typical Weight:** 88 grams

**Dimensions (mm):** 105 x 70 x 70 (H x L x W)

**Safety Features:** Reverse Polarity Protection

#### Important Notice

This datasheet contains information specific to products manufactured at the time of its publication.

©2017 Energizer Brands, LLC

Contents herein do not constitute a warranty.