


ENERGIZER 339

SILVER OXIDE



Industry Standard Dimensions

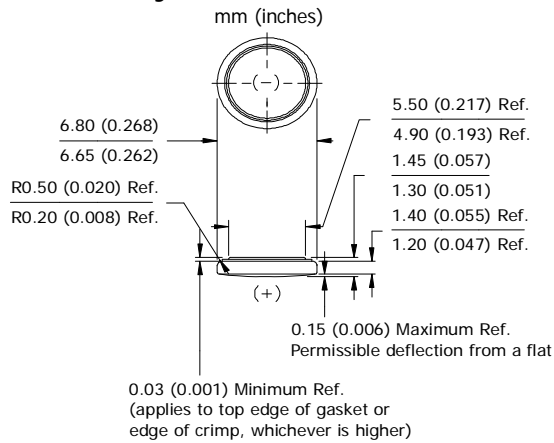


Specifications

- Chemical System:** Silver Oxide (Zn/Ag₂O)
- Nominal Voltage:** 1.55 Volts
- Typical Capacity:** 13 mAh* (to 1.2 volts)
- Capacity Test:** 68K ohm continuous drain at 21°C
- Typical Weight:** 0.22 grams
- Typical Volume:** 0.053 cubic centimeters
- Impedance (40 Hz):** 35 to 45 ohms

* Varies according to the applied load, temperature, and cutoff voltage.

Cross Section

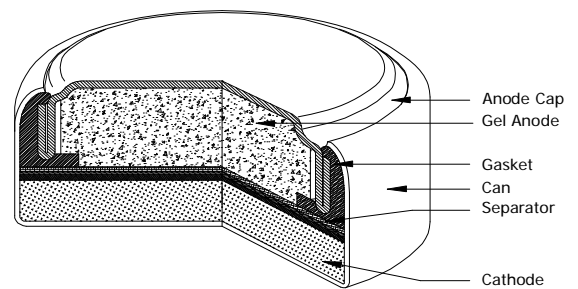


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @ 1.55V:
0.023 milliamperes
Load: 68K ohm

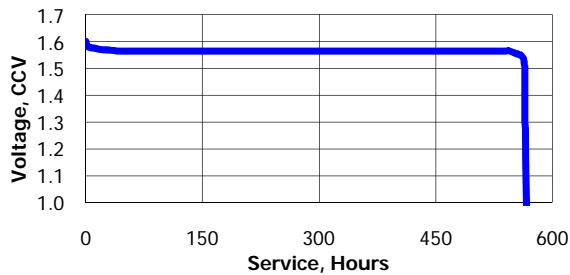


| <u>Schedule</u> | <u>Typical Drains</u> at 1.55V (milliamperes) | <u>Load</u> (ohm) | <u>Cutoff</u> 1.2V (hours) |
|-----------------|---|----------------------|----------------------------------|
| Continuous | 0.023 | 68K | 565 |


Temperature Characteristics

Typical Performance at Low Discharge Rates

Service Effects

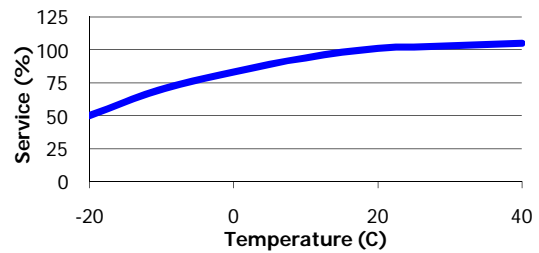

Storage Effects

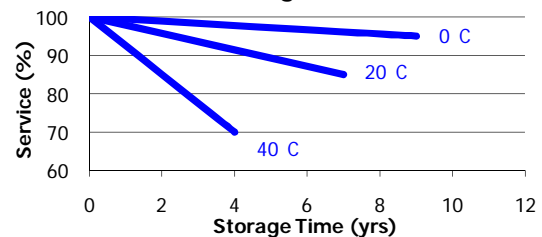

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.