


**ENERGIZER 344/350**

**SILVER OXIDE**



**Industry Standard Dimensions**

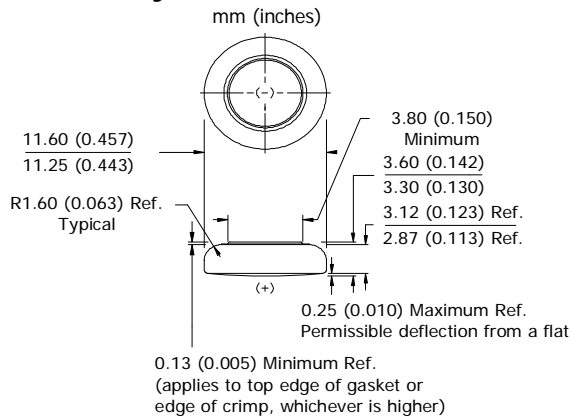


**Specifications**

**Chemical System:** Silver Oxide (Zn/Ag<sub>2</sub>O)  
**Designation:** IEC-SR42  
**Nominal Voltage:** 1.55 Volts  
**Typical Capacity:** 100 mAh\* (to 1.2 volts)  
**Capacity Test:** 8.2K ohm continuous drain at 21°C  
**Typical Weight:** 1.6 grams  
**Typical Volume:** 0.38 cubic centimeters  
**Impedance (40 Hz):** 15 to 25 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.


**Cross Section**

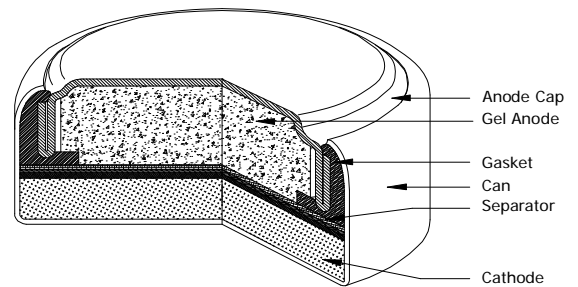

**Typical Discharge Characteristics**

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @ 1.55V:**  
0.189 milliamperes  
**Load:** 8.2K ohm

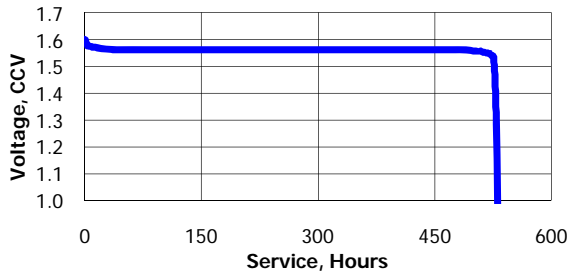


<u>Schedule</u>	<u>Typical Drains</u> at 1.55V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> (hours)
Continuous	0.189	8.2K	529


**Temperature Characteristics**

Typical Performance at Low Discharge rates

**Service Effects**

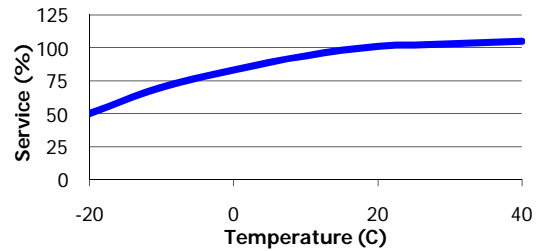

**Storage Effects**

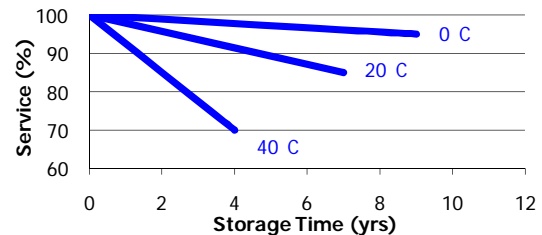

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.