


# Energizer AC10 - Mercury Free




(top view) (bottom view)

## Industry Standard Dimensions

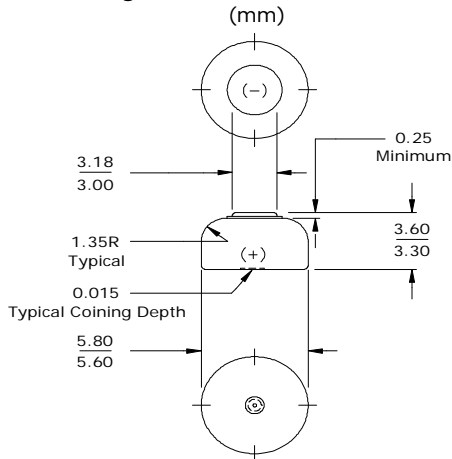

## Typical Discharge Characteristics

Schedule: 16 hours/day  
Typical Drain @ 1.3V:  
0.43 & 0.22 milliamperes  
Load: 3K & 6K ohms

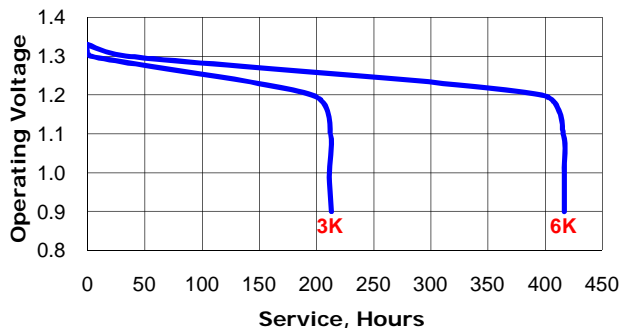

## Simulated Application Test

Typical Performance at 21°C & 50% RH

Schedule:	Typical Drains: at 1.3V (milliamperes)	Load (ohms)	Cutoff 0.9V (hours)
16 Hours/Day	0.43	3,000	211
16 Hours/Day	0.22	6,000	414

## Specifications


**Chemical System:** Zinc Air (ZnO<sub>2</sub>)  
**Tab Color:** Yellow  
**Designation:** IEC-PR70  
**Nominal Voltage:** 1.4 Volts  
**Typical Capacity:** 91 mAh (to 0.9 volts)  
 (Rated at 3k ohms at 21°C/50% RH)  
**Typical Weight:** 0.32 grams  
**Typical Volume:** 0.08 cubic centimeters

## Impedance


The total opposition that a battery offers to the flow of alternating current. Impedance is a combination of resistance and reactance.

The typical impedance of these cells on open circuit and during useful discharge varies from 5-20 ohms. This applies over a frequency range of 40-5,000 hertz at the current drains shown below.

### Impedance vs. Frequency

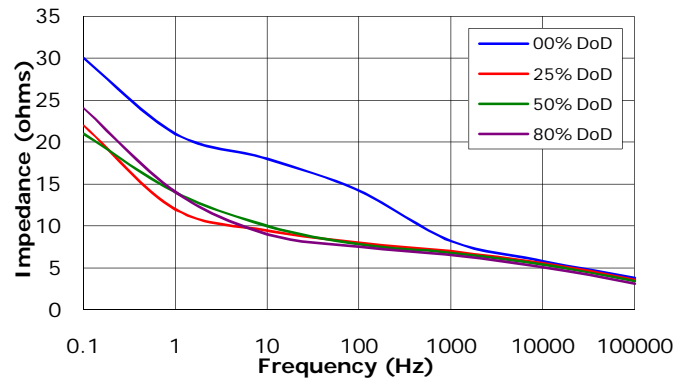

### Impedance vs. Depth of Discharge

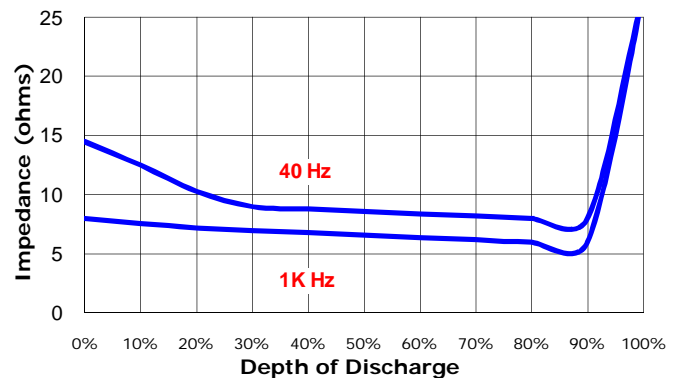

## Important Notice

This datasheet contains typical information specific to batteries manufactured at the time of its publication.  
**Contents herein do not constitute a warranty.**

©Energizer Holdings, Inc. - All Rights Reserved