


# Rechargeable AA-2650 (HR6)



**AA**



## Industry Standard Dimensions

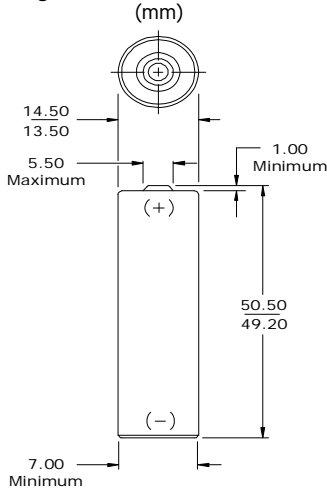

## Typical Discharge Characteristics

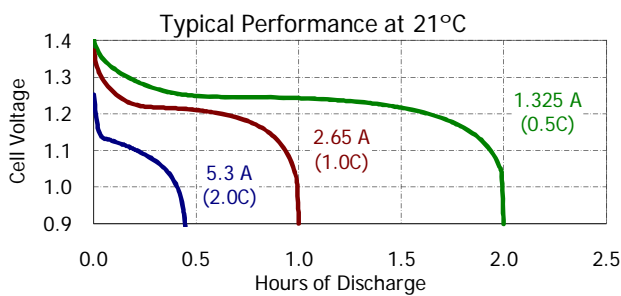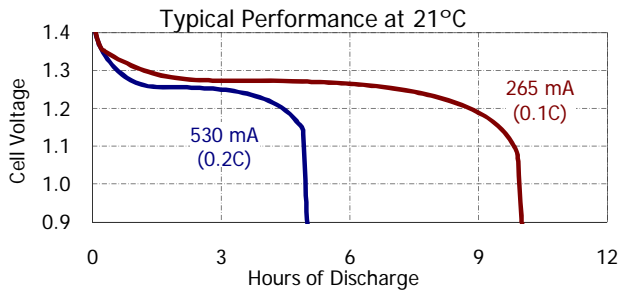

## Specifications

**Classification:** ACCU Rechargeable  
**Chemical System:** Nickel-Metal Hydride (NiMH)  
**Designation:** IEC-HR6  
**Nominal Voltage:** 1.2 Volts  
**Rated Capacity:** 2650 mAh (to 1.0 volts)  
 Based on 530 mA (0.2C) discharge rate  
**Typical Weight:** 30.0 grams  
**Typical Volume:** 8.3 cubic centimeters  
**Jacket:** Plastic Label

### Internal Resistance:

The internal resistance of the cell varies with state of charge, as follows:

Cell Charged	Cell 1/2 Discharged
30 milliohms	40 milliohms
(tolerance of ±20% applies to above values)	

### AC Impedance (No Load):

The impedance of the charged cell varies with frequency, as follows:

Frequency (Hz)	Impedance (milliohms) (Charged Cell)
1000	12

Above values based on AC current set at 1.0 ampere.  
Value tolerances are ±20%.

### Operating and Storage Temperatures:

To maintain maximum performance, observe the following general guidelines regarding environmental conditions.

- Charge: 0°C to 40°C
- Discharge: 0°C to 50°C
- Storage: -20°C to 30°C
- Humidity: 65±20%

Operating at extreme temperatures, will significantly impact battery cycle life.

### Important Notice

This datasheet contains information specific to battery chargers manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty