


**ENERGIZER X22**

**9V**



**Industry Standard Dimensions**

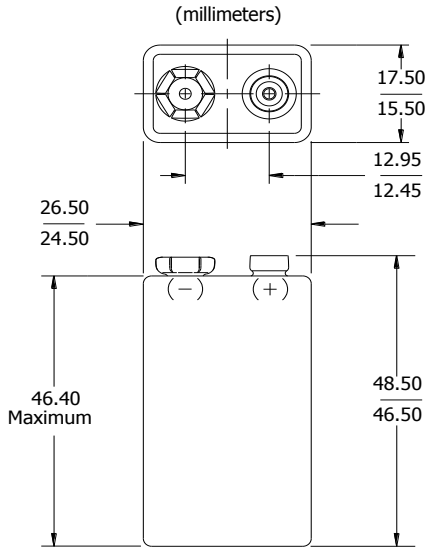


**Specifications**

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	IEC-6LR61
<b>Nominal Voltage:</b>	9.0 volts
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	46.0 grams
<b>Typical Volume:</b>	21.0 cubic centimeters
<b>Jacket:</b>	Metal
<b>Shelf Life:</b>	5 years at 21°C
<b>Terminal:</b>	Miniature Snap

**Milliamp-Hours Capacity**


Continuous discharge to 4.8 volts at 21°C

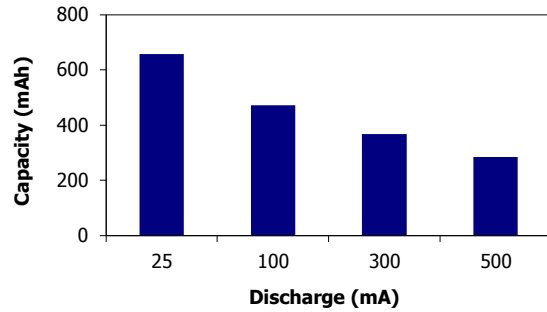

**Device Selection Guide:**

- Toy
- Baby Monitor
- Garage Opener
- Clock Radio
- Smoke Detector

**Battery Selection Indicator**

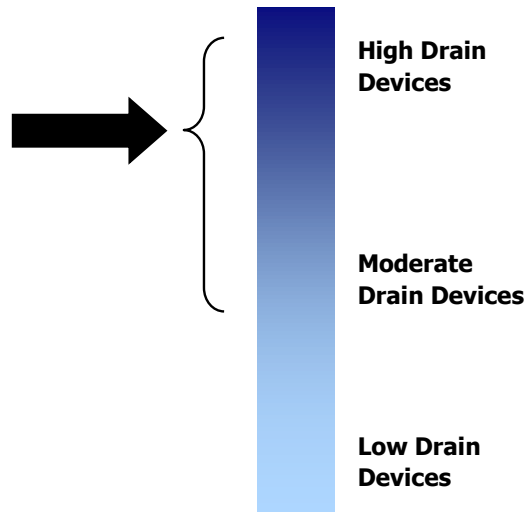

**Important Notice**


This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER X22

9V


**Constant Resistance Performance**

Typical Characteristics (21°C)

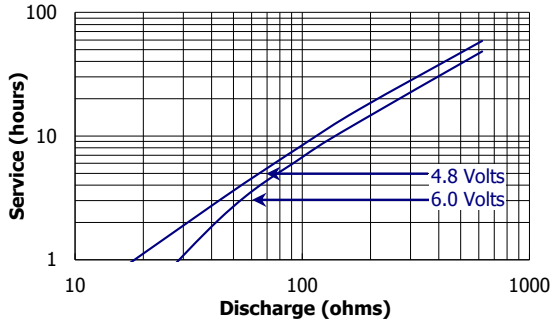

**Constant Current Performance**


Typical Characteristics (21°C)

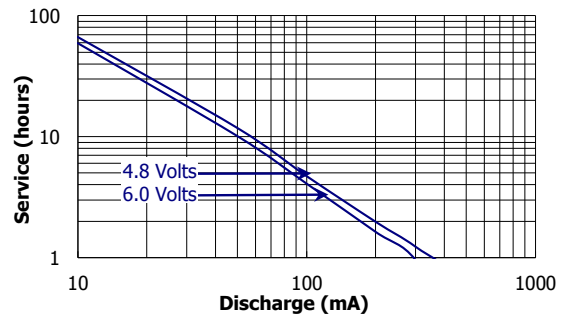

**Industry Standard Tests (21°C)**


**RADIO**

620 ohm 2 hrs/day

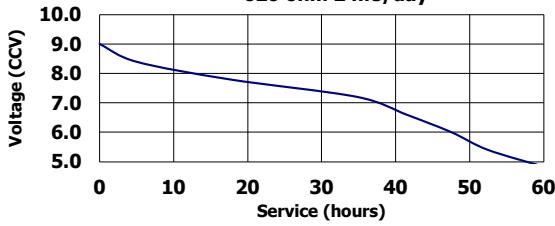


**LIGHTING**

270 ohm 1 hr/day

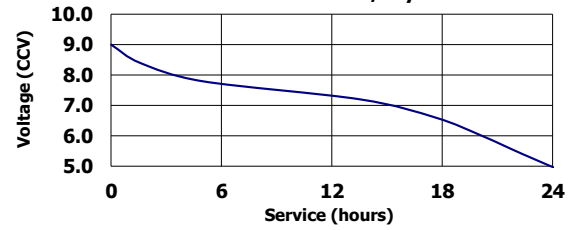

**ACCELERATED SMOKE DETECTOR**

10K/620 ohm 1 sec/hr pulse

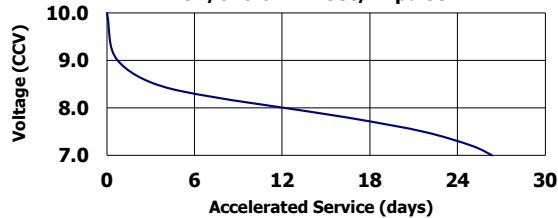

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.