


ENERGIZER X91

AA



Industry Standard Dimensions

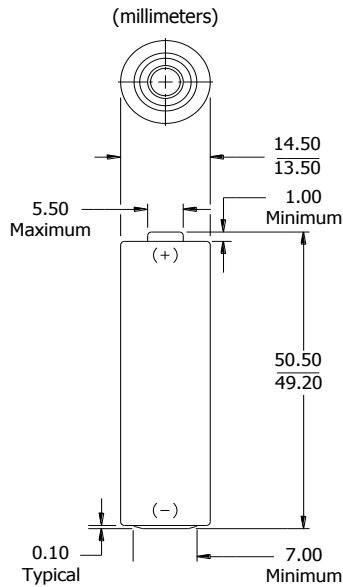


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	IEC-LR6
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C
Typical Weight:	23.0 grams
Typical Volume:	8.1 cubic centimeters
Jacket:	Plastic Label
Shelf Life:	10 years at 21°C
Terminal:	Flat Contact

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

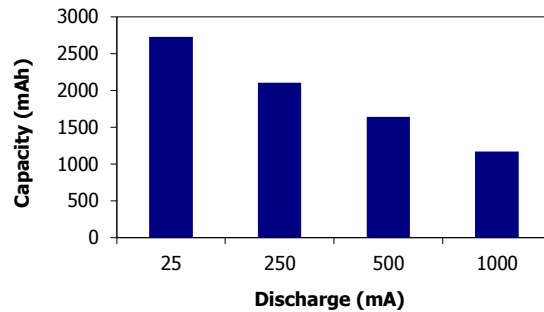

Device Selection Guide:

- Digital Camera
- Photoflash
- Games, CD's, MD's
- Tape Player
- Lighting
- Toy
- Remote Control
- Radio
- Clock

Battery Selection Indicator

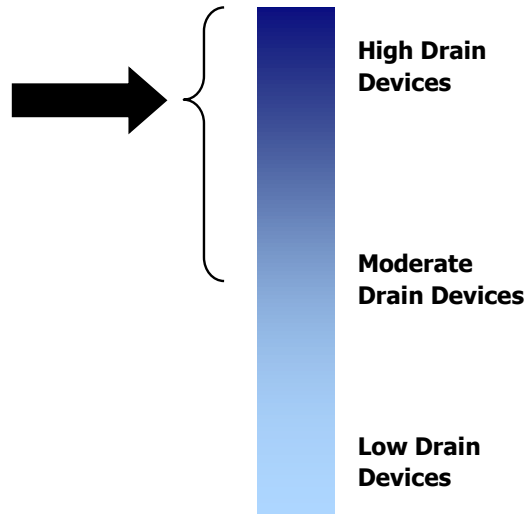

Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER X91

AA


Constant Power Performance

Typical Characteristics (21°C)

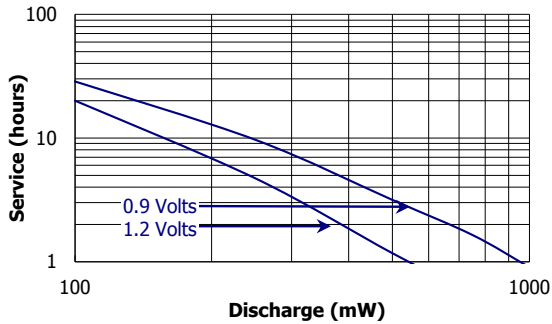


Constant Current Performance

Typical Characteristics (21°C)

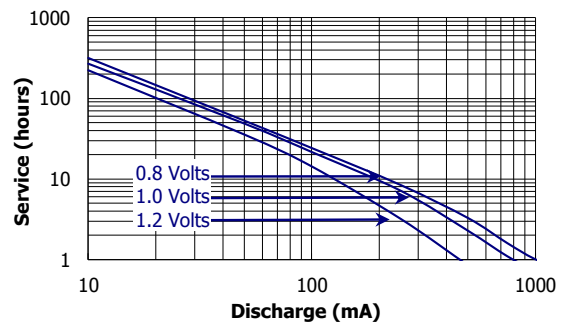


Constant Power Performance

Discharge Characteristics (21°C)

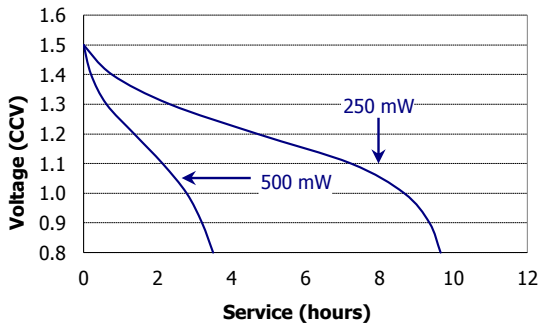


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

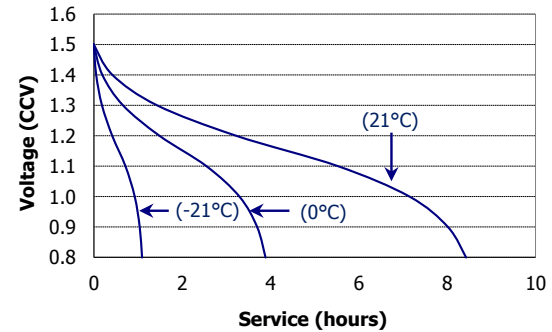


Industry Standard Tests (21°C)

CD/GAMES
250 mA 1 hr/day

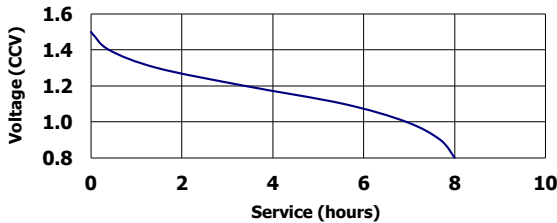

PHOTOFLASH 1K mA 10 sec/min 1 hr/day DIGITAL CAMERA 1.5K/.65K mW 22/.1/27.9s 10x hr

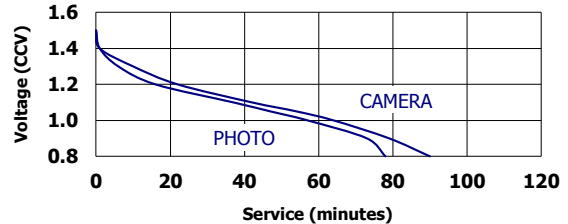

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.