


ENERGIZER NO. BR1225

LITHIUM COIN



Industry Standard Dimensions

(mm)

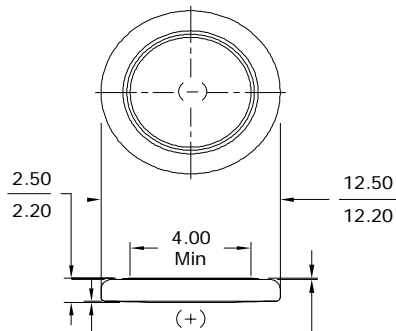


0.20 Maximum Ref.
Permissible defelection from a flat.

0.03 Minimum Ref.
(applies to top edge of gasket or edge of crimp, whichever is higher)

Specifications


Classification: "Lithium Coin"
Chemical System: Lithium / Poly-Carbon Monofluoride (Li/CFx)
Designation: IEC-BR1225
Nominal Voltage: 3.0 Volts
Typical Capacity: 48 mAh (to 2.0 volts)
 (Rated at 45K ohms at 21°C)
Typical Weight: 0.8 grams
Typical Volume: 0.3 cubic centimeters
Max Rev Charge: 1 microampere
Energy Density: 174 milliwatt hr/g, 432 milliwatt hr/cc
Shipping: For complete details, please reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations

Cross Section

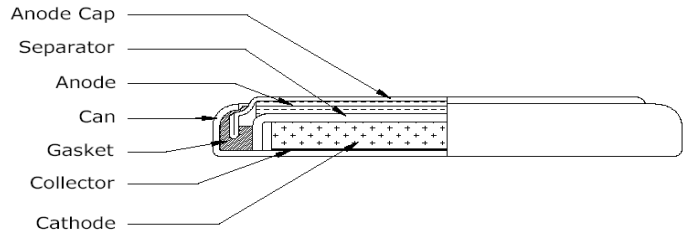

Typical Discharge Characteristics

Load: 45K ohms - Continuous
Typical Drain @ 2.7V: 0.06 mA

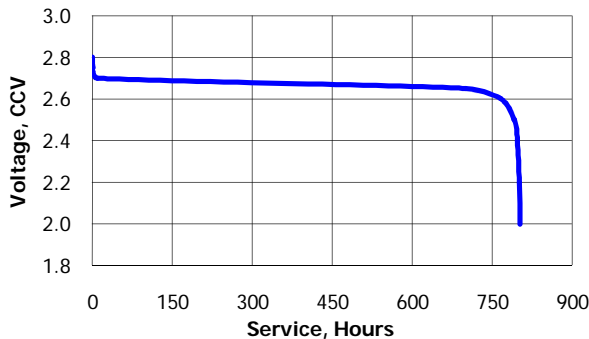

Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.7V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.06	45,000	800

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.