

# PRODUCT DATASHEET

## 2 AA LED Industrial Flashlight Intrinsically Safe



### IN2AALED

#### INTRINSICALLY SAFE

- Approved by global agencies for intrinsically safe lights



#### IDENTIFIABLE

- Bright industrial yellow color



#### WATERPROOF

- Protects interior components from water damage
- IP67



#### IMPACT RESISTANT

- Survives a 2 meter drop



#### ECONOMICAL

- Reduced battery consumption for low operating cost
- 20 hour run time



Approved by global safety agencies, the IN2AALED is ideal for work in harsh conditions. The light is waterproof, dustproof and survives a 2 meter drop test.

A built-in carabiner belt clip makes for easy access and the compact size fits easily in any toolbox. The bright industrial yellow color provides instant recognition. The White LED lamp supplies steady, bright illumination.




- UL/CUL intrinsic safety for hazardous locations Class I Div. 1 Groups A,B,C, & D, Class II Div. 1 Groups E,F,&G, and Class III Div. 1; T4. MSB for methane-air mixtures.
- ATEX intrinsically safe flashlight for  $\text{Ex}$  IM2/II1G EEx ia I/IIC T4
- IECEx intrinsically safe flashlight for Ex ia IIC T4
- -20°C to 40°C ambient operating range.
- CE 0539
- EN60529 ingress protection level IP67.

**Before Using Your Flashlight:**  
Please read all instructions and cautionary markings on the package and light

#### Product Detail:

<b>Designation:</b>	Contractor 2AA LED Industrial Flashlight
<b>Model:</b>	IN2AALED
<b>Color:</b>	Yellow and Black
<b>Power Source:</b>	Two "AA"
<b>ANSI/NEDA:</b>	15 series
<b>Lamp:</b>	Three White Nichia GS LEDs
<b>Peak Output Rating:</b>	30 Lumens
<b>Runtime:</b>	20 Hours
<b>Durability:</b>	Survives 2 meter drop
<b>Typical Weight:</b>	66 grams (without batteries)
<b>Dimensions (mm):</b>	151.6 x 35.1 x 40.6

#### Performance:

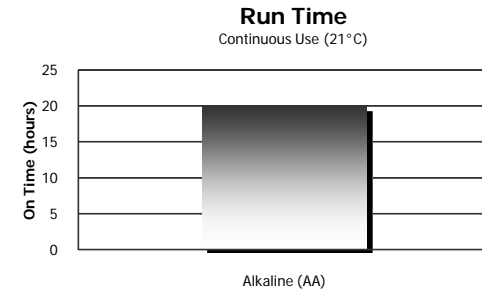

#### Important Notice

This datasheet contains information specific to products manufactured at the time of its publication

**Contents herein do not constitute a warranty**  
©Energizer / All Rights Reserved