




Eveready Battery Company, Inc.
 Checkerboard Square
 St. Louis, MO 63164
 Telephone: 1-800-383-7323
 Internet: www.energizer.com

Engineering Data

EVEREADY NO. 216




**LeClanche 9V
 Classic**
 No Added Mercury or Cadmium

Dimensions (mm)




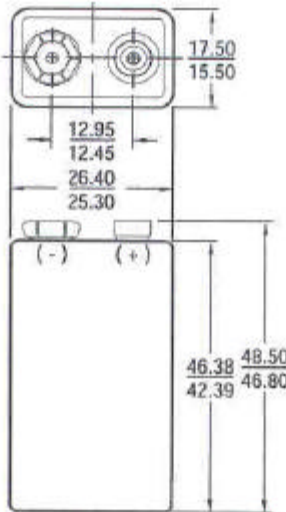


Millimeters	Inches
12.45	.490
12.95	.510
15.50	.610
17.50	.689
25.30	.996
26.40	1.039
42.39	1.669
46.38	1.826
46.80	1.843
48.50	1.909

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
Designation: ANSI-1604, IEC-6F22
Battery Voltage: 9 Volts
Average Weight: 36 grams (1.3 oz.)
Volume: 22.4 cubic centimeters (1.4 cubic inch)
Average Service Capacity (to 0.8 Volt / cell): 200 mAh
 (Rated capacity at 25 mA continuous drain)
Cells: Six No. 118P in series
Jacket: Metal

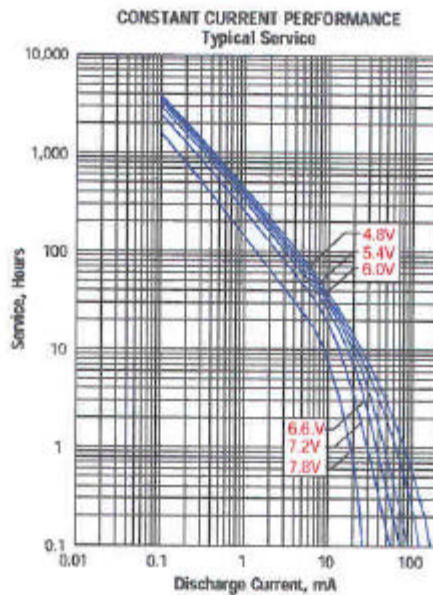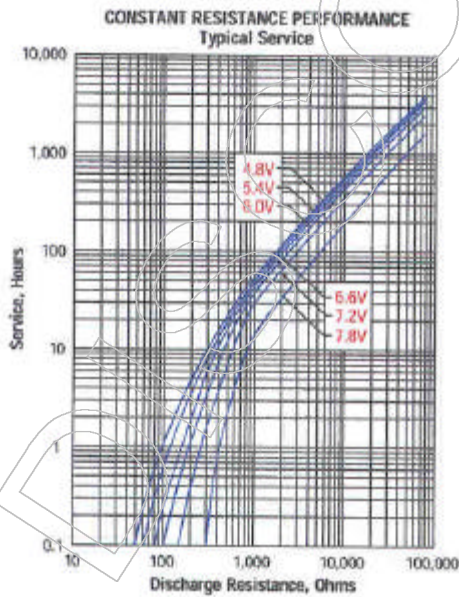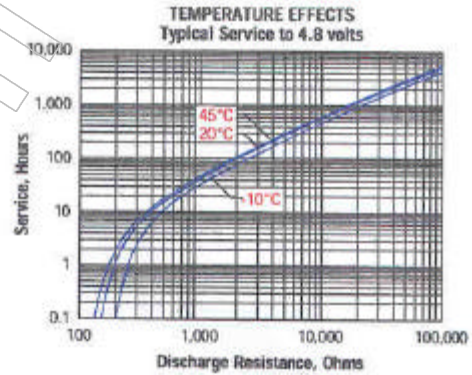

TYPICAL APPLICATIONS

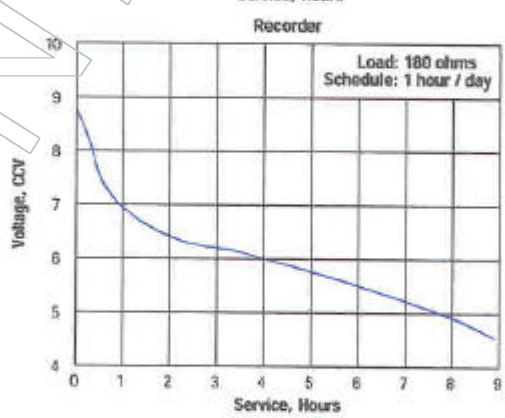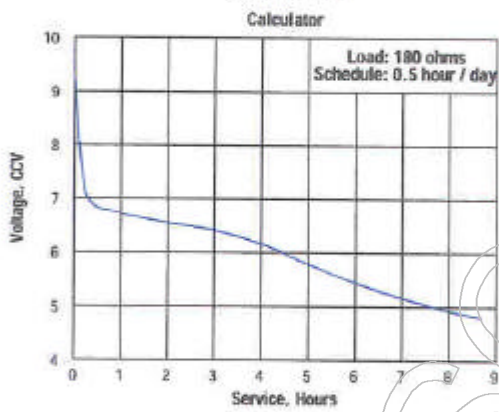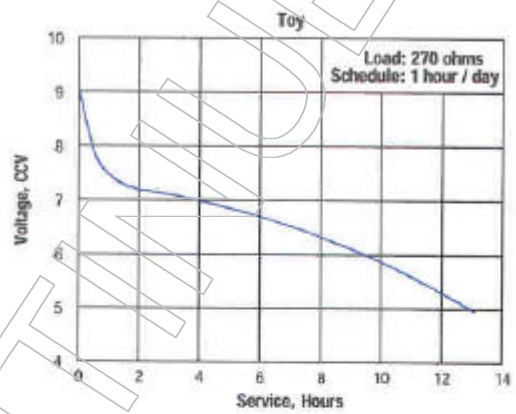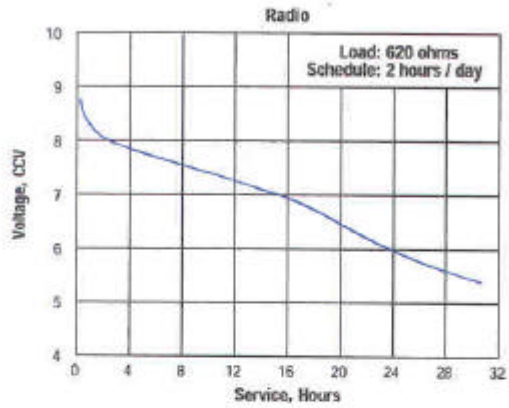

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.