


ENERGIZER 301

SILVER OXIDE



Industry Standard Dimensions

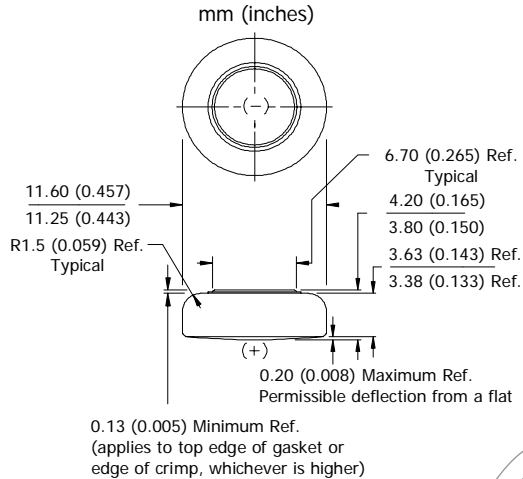


Specifications

Chemical System: Silver Oxide (Zn/Ag₂O)
Designation: ANSI-1132SO / IEC-SR43
Nominal Voltage: 1.55 Volts
Typical Capacity: 110 mAh* (to 1.3 volts)
Capacity Test: 8.2K ohm continuous drain at 21°C
Typical Weight: 1.7 grams (0.06 oz.)
Typical Volume: 0.44 cubic centimeters (0.027 cubic inch)
Impedance (40 Hz): 10 to 20 ohms

* Varies according to the applied load, temperature, and cutoff voltage.

Cross Section

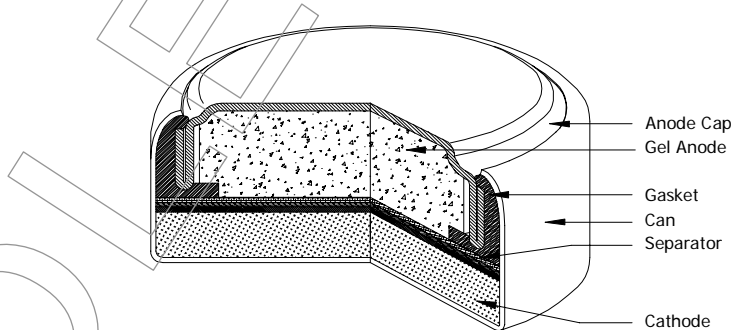


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @1.55V:
 0.189 milliamperes
Load: 8.2K ohm

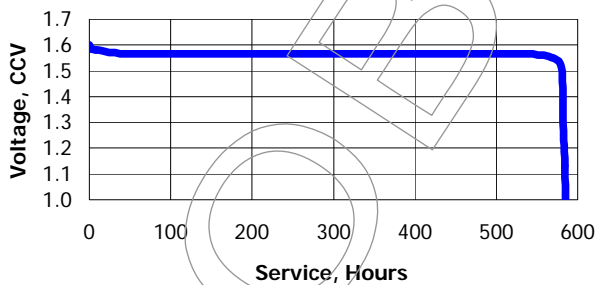


Schedule	Typical Drains at 1.55V (milliamperes)	Load (ohm)	Cutoff 1.3V (hours)
Continuous	0.189	8.2K	582


Temperature Characteristics

Typical Performance at Low Discharge Rates

Service Effects

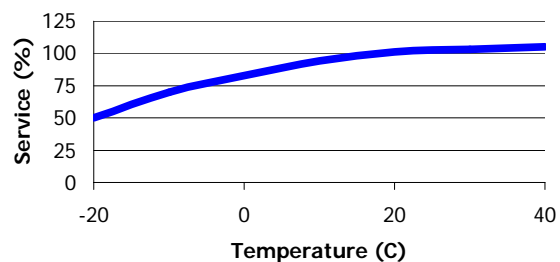

Storage Effects

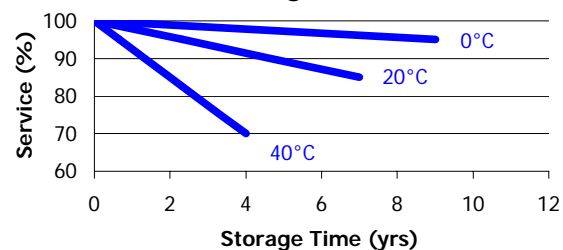

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.