


## ENERGIZER NO. 411



### Industry Standard Dimensions in mm (inches)

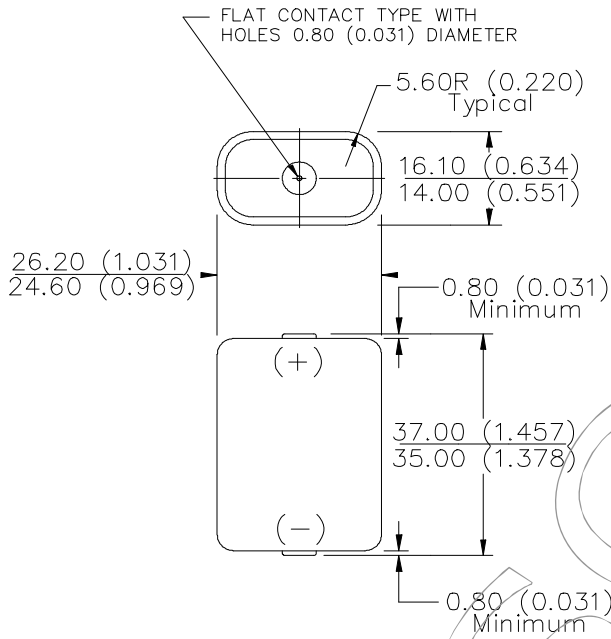

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-208, IEC-10F20

**Battery Voltage:** 15 Volts

**Average Weight:** 27 grams (1.0 oz.)


**Volume:** 15 cubic centimeters (0.9 cubic inch)

**Average Capacity:** 140 mAh to 0.8 volts/cell  
(Rated at 25 mA continuous drain at 21°C)

**Cells:** Ten No. 112 in series

**Jacket:** Metal

**TYPICAL DISCHARGE CURVE**  
 Simulated Test @ 21°C (70°F)

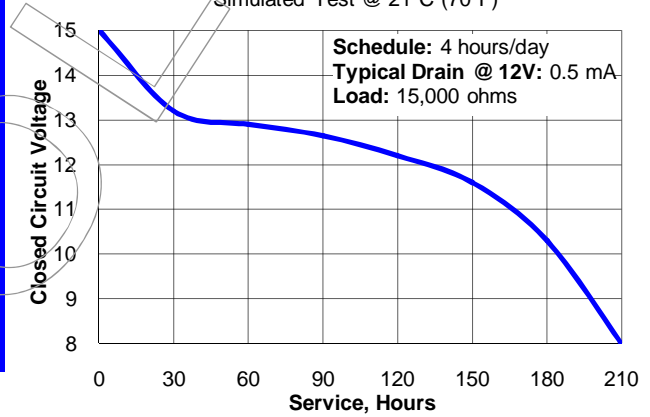

### Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 12V (milliamperes)	Load (ohms)	Cutoff Voltage					
			8.0V	9.0V	10V	11V	12V	13V
4 hours/day	0.8	15,000	209	197	184	167	134	55

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved