


## ENERGIZER NO. A93V



Industry Standard Dimensions in mm (inches)

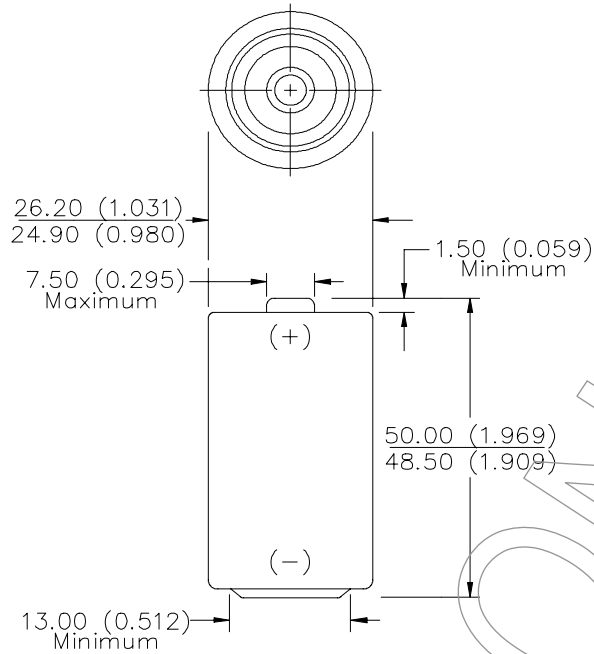

Negative cover detail referenced on page 2.

**C**

**Chemical System:** Alkaline  
 Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)

**Designation:** ANSI-14A, IEC-LR14

**Battery Voltage:** 1.5 Volts

**Internal Resistance:** 324 Milliohms (Fresh)

**Operating Temp:** -18°C to 55°C (0°F to 130°F)

**Average Capacity:** 8,000 mAh (to 0.8 volts)  
 (Rated capacity at 25 mA continuous drain.)

**Average Weight:** 66.2 grams (2.3 oz.)


**Volume:** 26.9 cubic centimeters (1.6 cubic inch)

**Cell:** One No. 3-335 (size 'C')


**Jacket:** Plastic Label

**Shelf Life:** 5 years (80% of rated capacity)


### TEMPERATURE EFFECTS Typical Service to 0.8 Volts

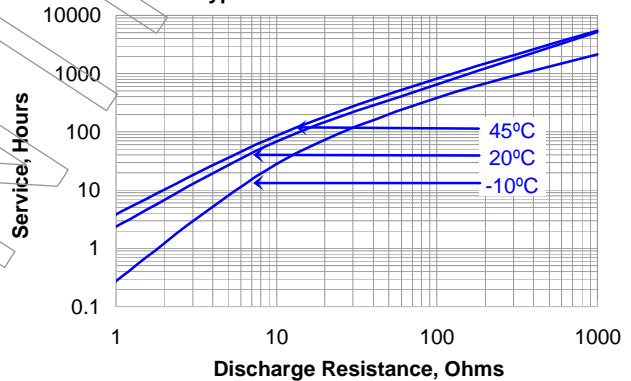

### CONSTANT RESISTANCE PERFORMANCE Typical Service

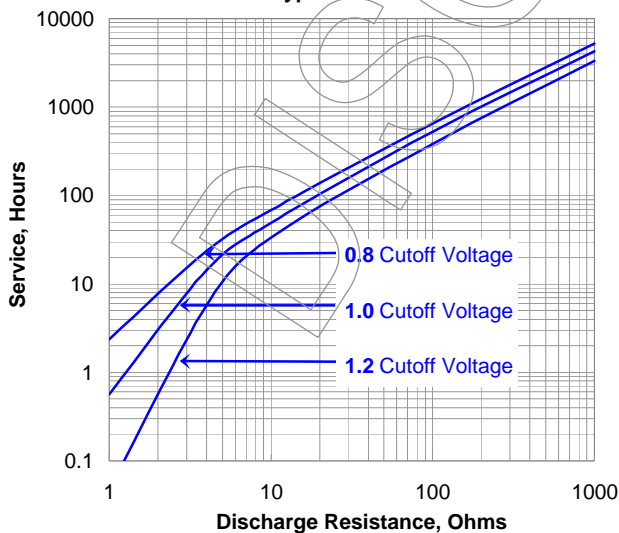

### CONSTANT CURRENT DISCHARGE Typical Service

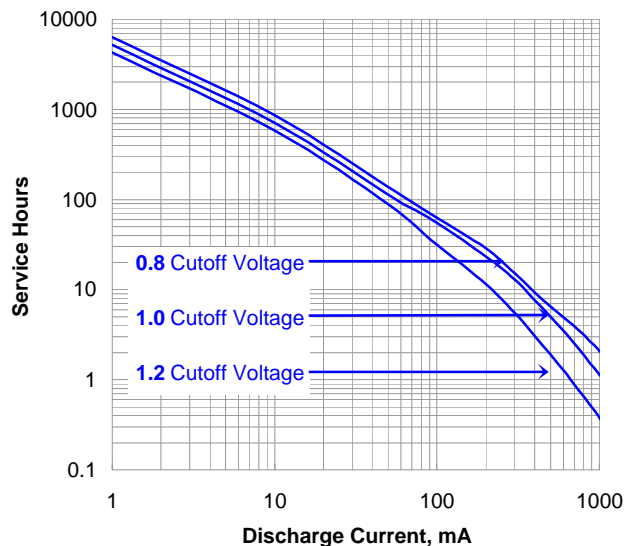

### Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**





Copyright © Eveready Battery Co. - All rights reserved

**ENERGIZER NO. A93V**

NEGATIVE COVER VIEW

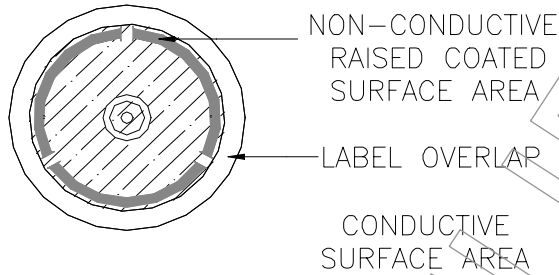

**ANSI - IEC Industry Standard Tests @ 20° C**

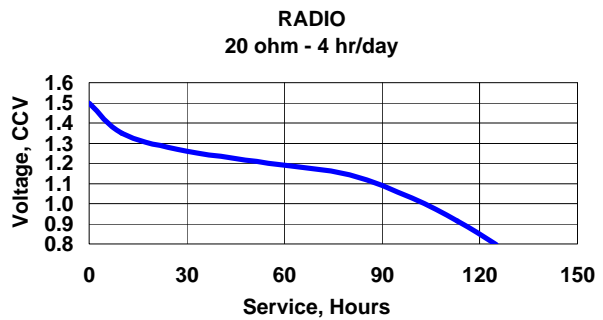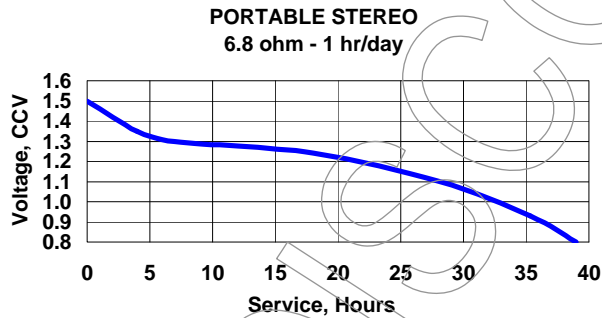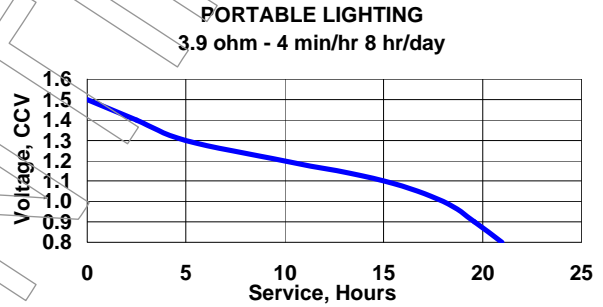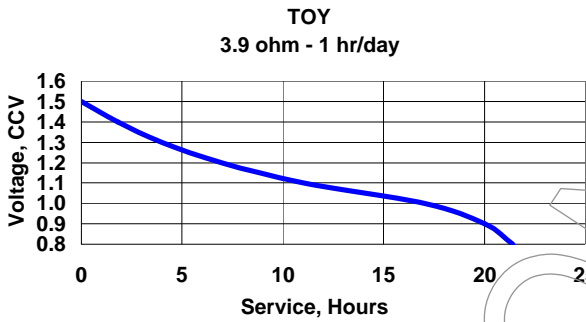

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All rights reserved