


ENERGIZER NO. BR2330

LITHIUM COIN




Industry Standard Dimensions
(mm)

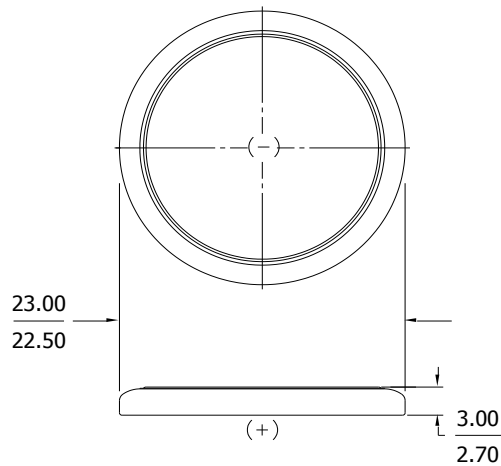

Specifications

Classification:	"Lithium Coin"
Chemical System:	Lithium / Poly-Carbon Monofluoride (Li/CFx)
Designation:	IEC-BR2330
Nominal Voltage:	3.0 Volts
Typical Capacity:	255 mAh (to 2.0 volts) (Rated at 10K ohms at 21°C)
Typical Weight:	3.5 grams
Typical Volume:	1.3 cubic centimeters
Max Rev Charge:	1 microampere
Energy Density:	211 milliwatt hr/g, 569 milliwatt hr/cc

Cross Section

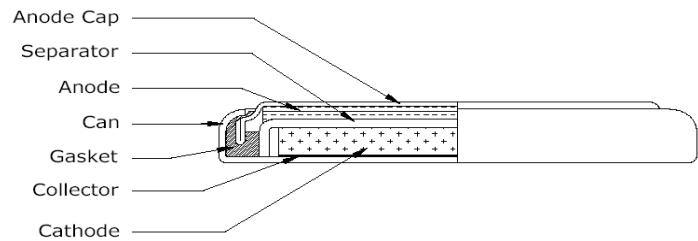

Typical Discharge Characteristics

Load: 10K ohms - Continuous
Typical Drain @ 2.7V: 0.28 mA



Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.7V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.28	10,000	911

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.