

**ENERGIZER CR2320**


**Lithium Coin**



**Industry Standard Dimensions**  
mm (inches)



This Battery has Underwriters Laboratories component Recognition

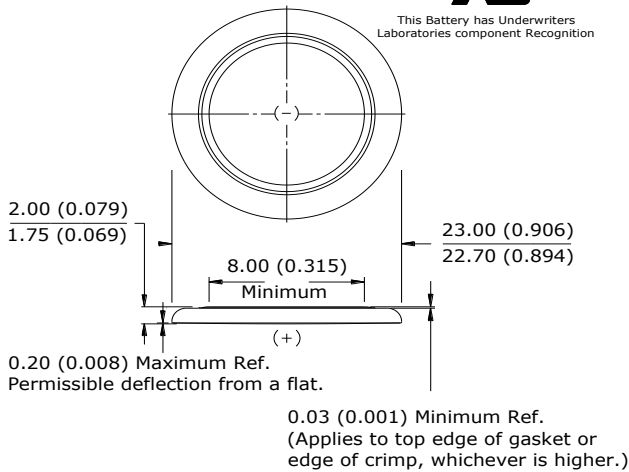


**Simulated Application test**

Typical Performance at 21°C (70°F)

| Schedule:  | Typical Drains:<br>at 2.9V<br>(mA) | Load<br>(ohms) | Cutoff<br>2.0V<br>(hours) |
|------------|------------------------------------|----------------|---------------------------|
| Continuous | 0.29                               | 10,000         | 466                       |

**Typical Discharge Characteristics**

Load: 10K ohms - Continuous  
Typical Drain @ 2.9V: 0.29 mA

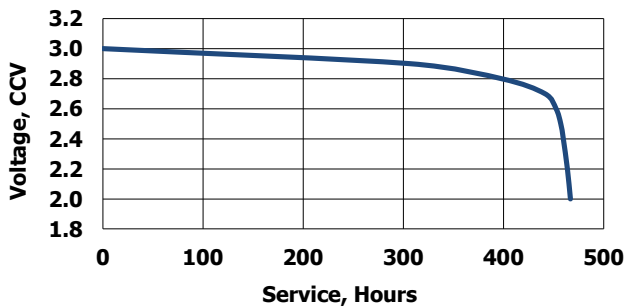


**Internal Resistance Characteristics**

Pulse Test at 21°C (70°F)

**Bkgnd Drain:** Continuous  
10K ohms  
0.29 mA @2.9V

**Pulse Drain:** 2 seconds X 12 times/day  
400 ohms  
6.8 mA @2.7V

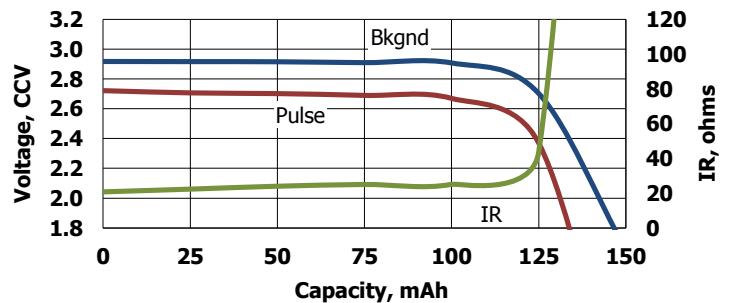

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.



Safety:

**(1) KEEP OUT OF REACH OF CHILDREN.** Swallowing may lead to serious injury or death in as little as 2 hours due to chemical burns and potential perforation of the esophagus. **Immediately see doctor; have doctor phone (202) 625-3333.**

**(2) Battery compartment design.** To prevent children from removing batteries, battery compartments should be designed with one of the following methods: a) a tool such as screwdriver or coin is required to open battery compartment or b) the battery compartment door/cover requires the application of a minimum of two independent and simultaneous movements of the securing mechanism to open by hand. Screws should remain captive with the battery door or cover.