


# ENERGIZER CR2430

## Lithium Coin



### Industry Standard Dimensions

mm (inches)

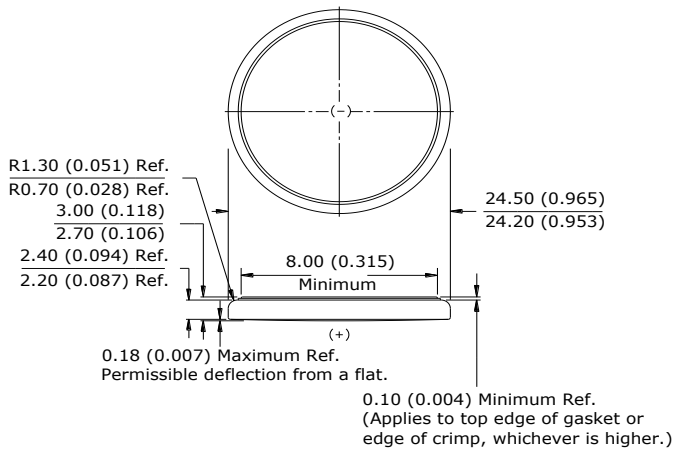


### Simulated Application test

Typical Performance at 21°C (70°F)

| Schedule:  | Typical Drains:<br>at 2.9V<br>(mA) | Load<br>(ohms) | Cutoff<br>2.0V<br>(hours) |
|------------|------------------------------------|----------------|---------------------------|
| Continuous | 0.19                               | 15,000         | 1,690                     |

### Typical Discharge Characteristics

Load: 15K ohms - Continuous  
Typical Drain @ 2.9V: 0.19 mA

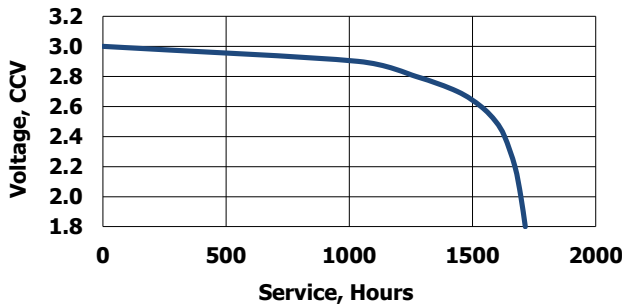


### Internal Resistance Characteristics

Pulse Test at 21°C (70°F)

**Bkgnd Drain:** Continuous  
15K ohms  
0.19 mA @2.9V

**Pulse Drain:** 2 seconds X 12 times/day  
300 ohms  
9.3 mA @2.7V

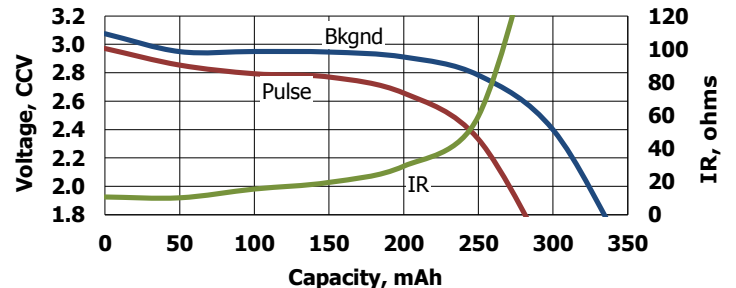

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

### Specifications

|                            |   |
|----------------------------|---|
| <b>Classification:</b>     | "Lithium Coin"  |
| <b>Chemical System:</b>    | Lithium / Manganese Dioxide (Li/MnO <sub>2</sub> )    |
| <b>Designation:</b>        | ANSI / NEDA-5011LC, IEC-CR2425                        |
| <b>Nominal Voltage:</b>    | 3.0 Volts   |
| <b>Typical Capacity:</b>   | 320 mAh (to 2.0 volts)<br>(Rated at 15K ohms at 21°C) |
| <b>Typical Weight:</b>     | 4.6 grams (0.16 oz.)                                  |
| <b>Typical Volume:</b>     | 1.3 cubic centimeters (0.08 cubic inch)               |
| <b>Max Rev Charge:</b>     | 1 microampere   |
| <b>Energy Density:</b>     | 183 milliwatt hr/g, 647 milliwatt hr/cc               |
| <b>Typical Li Content:</b> | < 0.3g  |
| <b>Operating Temp:</b>     | -30C to 60C   |
| <b>Self Discharge:</b>     | ~1% / year  |

### Safety:



**(1) KEEP OUT OF REACH OF CHILDREN.** Swallowing may lead to serious injury or death in as little as 2 hours due to chemical burns and potential perforation of the esophagus. **Immediately see doctor; have doctor phone (202) 625-3333.**

**(2) Battery compartment design.** To prevent children from removing batteries, battery compartments should be designed with one of the following methods: a) a tool such as screwdriver or coin is required to open battery compartment or b) the battery compartment door/cover requires the application of a minimum of two independent and simultaneous movements of the securing mechanism to open by hand. Screws should remain captive with the battery door or cover.