


Lithium (CRV3)



Specifications

Classification:	"Lithium"
Chemical System:	Lithium / Manganese Dioxide (Li/MnO ₂)
Nominal Voltage:	3.0 Volts
Storage Temp:	-40°C to 60°C
Operating Temp:	-40°C to 60°C
Typical Capacity:	3000 mAh (to 2.0 volts) (rated at 200 mA at 21°C)
Typical Weight:	38 grams
Typical Volume:	24 cubic centimeters
Max Discharge:	2.0 amps continuous 3.0 amps pulse (2 sec on/8 sec off)
Cells:	Two CR14500 in parallel configuration
Typical Li Content:	1.25 grams


Industry Standard Dimensions
(mm)

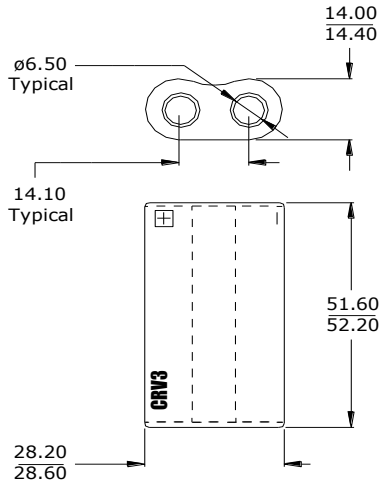

This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions.


Typical Discharge Characteristics

Constant Current Discharge at 21°C

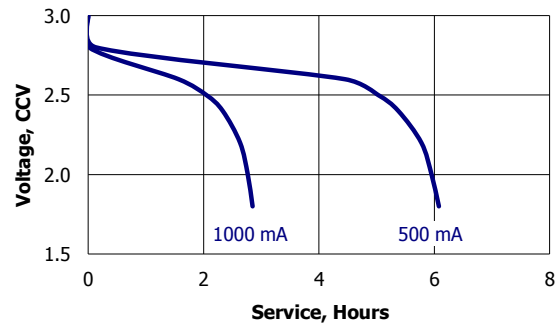


Typical Discharge Characteristics

Pulse Discharge

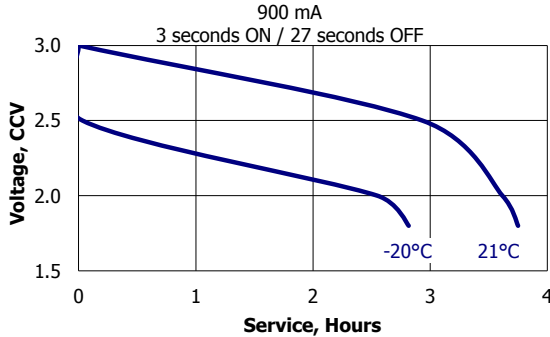

Constant Power Discharge at 21°C

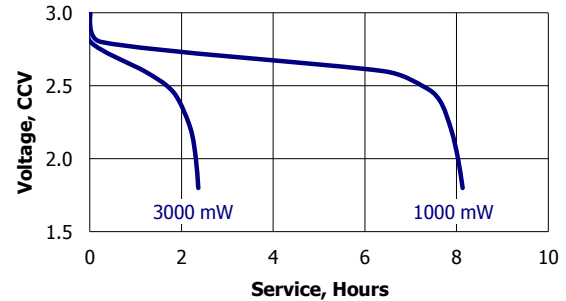

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.