




Engineering Data

Alkaline 3V

NOT INTENDED FOR RETAIL TRADE

EVEREADY NO. EN132A

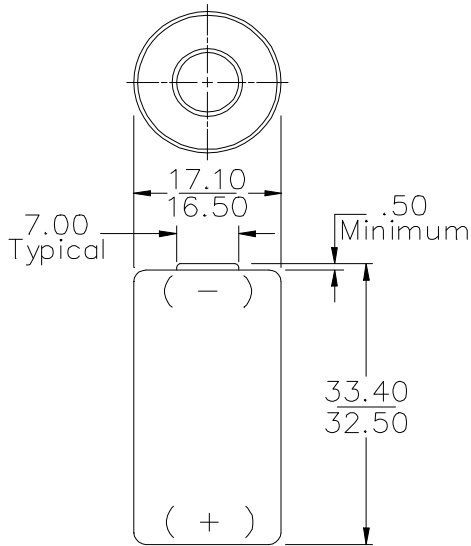


Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
Designation: ANSI / NEDA-1200A, IEC-2LR50
Battery Voltage: 3.0 Volts
Typical Weight: 18 grams (0.6 oz.)
Volume: 7.7 cubic centimeters (0.5 cubic inch)
Average Service capacity (to 1.8 Volt): 650 mAh
 (Rated Capacity at 440 ohms continuous at 20°C)
Cell: Two No. 1A-P in series

Dimensions (mm)

Millimeters	Inches
0.50	0.020
7.00	0.276
16.50	0.650
17.10	0.673
32.50	1.280
33.40	1.315

TYPICAL DISCHARGE CHARACTERISTICS Simulated Test at 21°C (70°F)

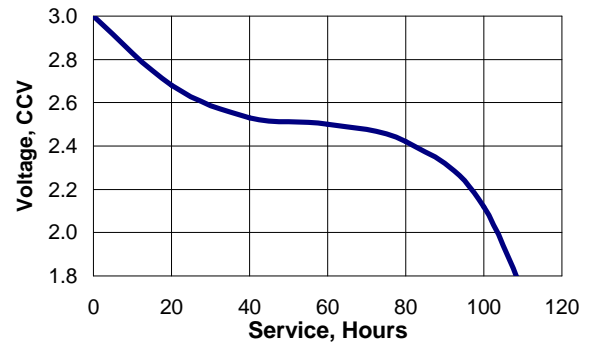

SIMULATED APPLICATION TESTS Estimated Average Service at 21°C (70°F)

Schedule	Typical Drains 2.5V (milliamperes)	Load (ohms)	Cutoff Voltage
			1.8V hours
24 hours / day	5.7	440	114

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.