




Engineering Data

Alkaline 9V

NOT INTENDED FOR RETAIL TRADE

EVEREADY NO. EN136A

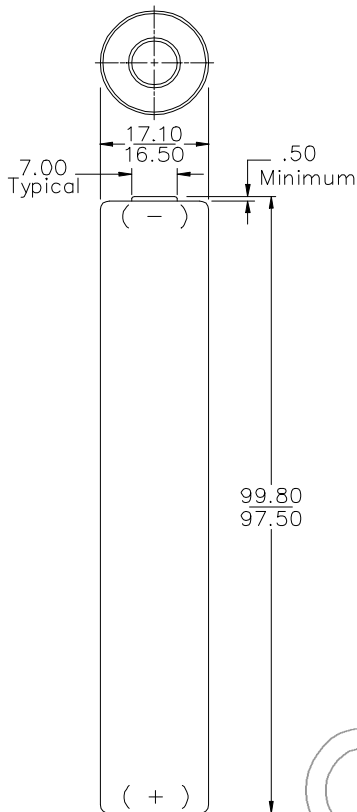


Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
Designation: ANSI / NEDA-1615A, IEC-6LR50
Battery Voltage: 9.0 Volts
Typical Weight: 54 grams (1.9 oz.)
Volume: 22.9 cubic centimeters (1.4 cubic inch)
Average Service capacity (to 5.4 Volt): 650 mAh
 (Rated Capacity at 1.32K ohms continuous at 20°C)
Cell: Six No. 1A-P in series

Dimensions (mm)

Millimeters	Inches
0.50	0.020
7.00	0.276
16.50	0.650
17.10	0.673
97.50	3.839
99.80	3.929

TYPICAL DISCHARGE CHARACTERISTICS
 Simulated Test at 21°C (70°C)

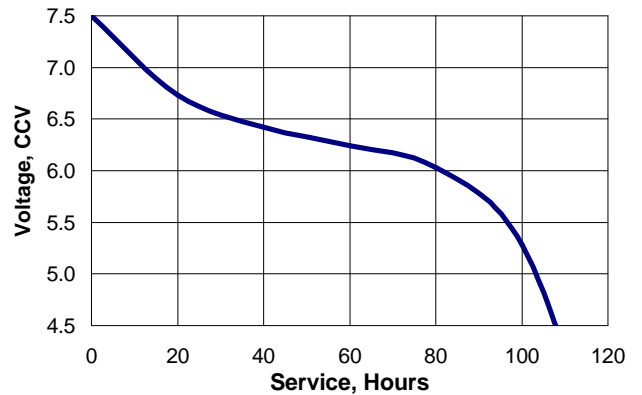

SIMULATED APPLICATION TESTS

Estimated Average Service at 21°C (70°F)

Schedule	Typical Drains 7.5V (milliamperes)	Load (ohms)	Cutoff Voltage
			5.4V hours
24 hours / day	5.7	1320	114

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.