


## ENERGIZER NO. EV122

### 9V



Industry Standard Dimensions in mm (inches)

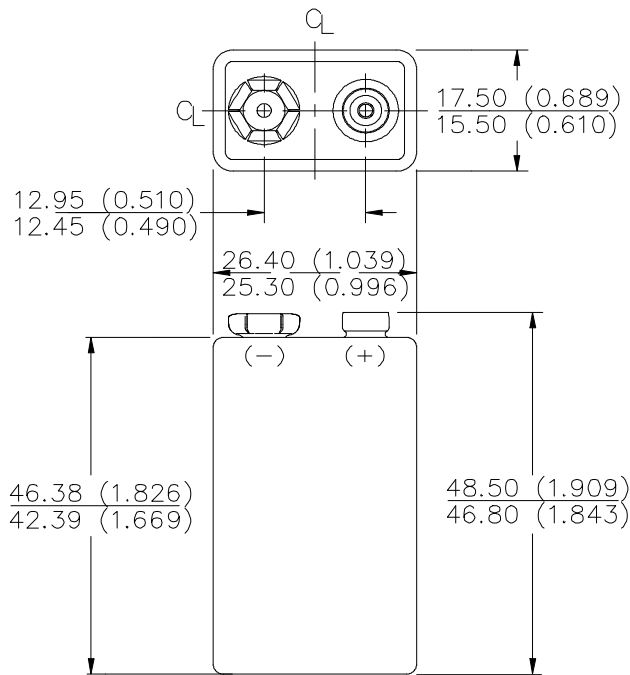


**INDUSTRIAL SUPER HEAVY DUTY**  
**NOT INTENDED FOR RETAIL TRADE**

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)


**Designation:** ANSI-1604D, IEC-6F22  
**Battery Voltage:** 9.0 Volts  
**Operating Temp:** -5°C to 55°C (20°F to 130°F)  
**Average Weight:** 37.0 grams (1.3 oz.)  
**Volume:** 20.3 cubic centimeters (1.2 cubic inch)  
**Average Capacity:** 330 mAh to 4.8 volts  
 (Rated at 25 mA continuous at 21°C)

**Cell:** Six No. 118P in series  
**Jacket:** Metal


**TEMPERATURE EFFECTS**  
 Typical Service to 4.8 Volts

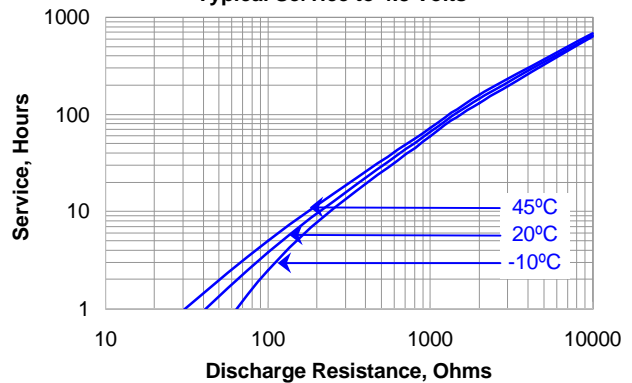

**CONSTANT RESISTANCE PERFORMANCE**  
 Typical Service

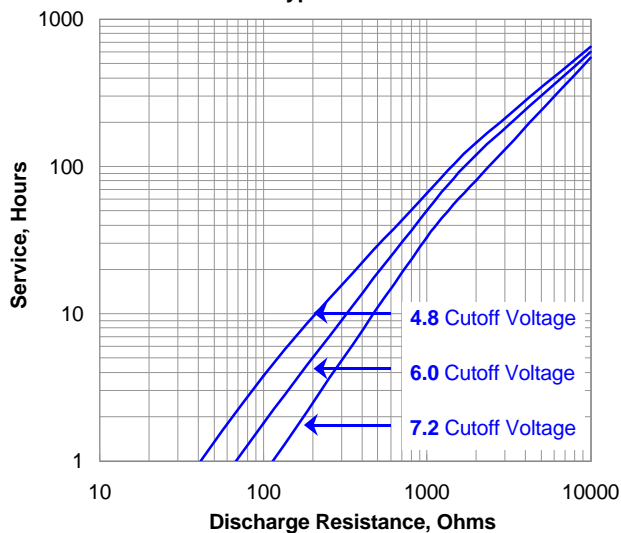

**CONSTANT CURRENT DISCHARGE**  
 Typical Service

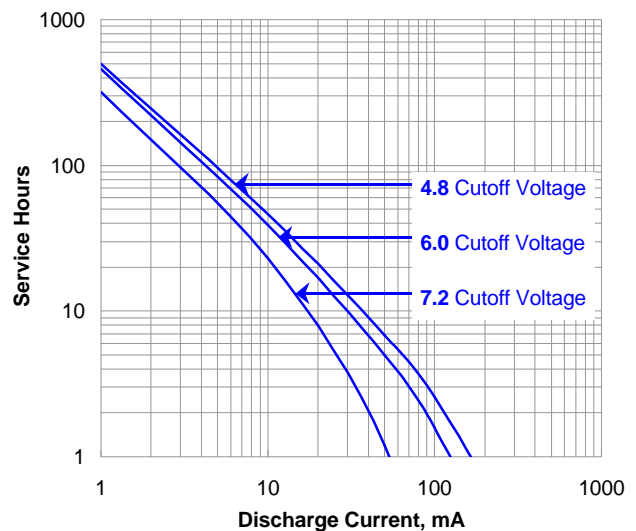

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All Rights Reserved

## ENERGIZER NO. EV122

### Typical Applications

**RADIO**  
620 ohm - 2 hours/day



**TOY**  
270 ohm - 1 hr/day



**CALCULATOR**  
180 ohm - 0.5 hr/day



**RECORDER**  
180 ohms - 1 hr/day



### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All Rights Reserved