


## ENERGIZER NO. EV190

### 6V



Industry Standard Dimensions in mm (inches)

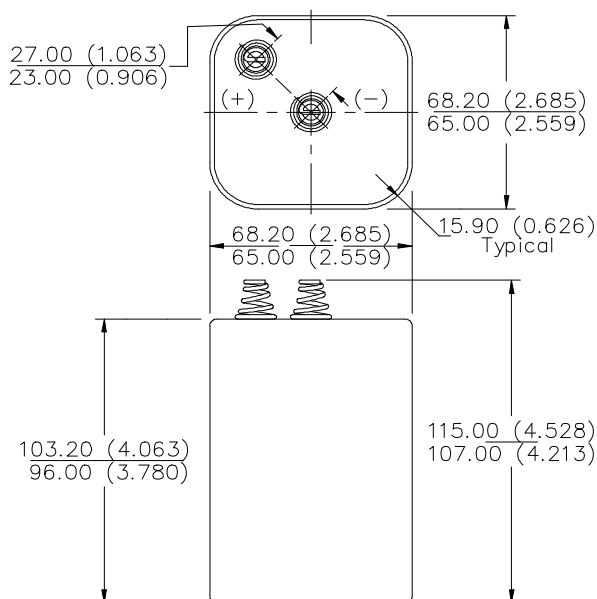

THIS BATTERY WILL PASS FREELY THROUGH A CYLINDRICAL TUBE 82.6 DIAMETER x 101.6 LONG.

**INDUSTRIAL HEAVY DUTY**

NOT INTENDED FOR RETAIL TRADE

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)

**Designation:** ANSI-908CD, IEC-4R25X

**Battery Voltage:** 6 Volts

**Operating Temp:** -18°C to 55°C (0°F to 130°F)

**Average Weight:** 589 grams (20.8 oz.)

**Volume:** 480 cubic centimeters (29.2 cubic inch)

**Average Capacity:** 11 Ah to 0.8 volts / cell  
 (Rated at 25k ohms continuous at 21°C)

**Cell:** Four No. 60 (size "F") in series

**Terminals:** Coil Spring

**Jacket:** Plastic


### INTERNAL RESISTANCE VS. TEMPERATURE

The measurement is an approximation of the battery's actual internal resistance. It is sensitive to the loads and operator technique.


**Schedule:** Background Load 600 ohms  
 Pulse Load 10 ohms  
 Pulse Duration 1 second

Temperature	Typical Ri (ohms)
45°C (113°F)	0.7
21°C (70°F)	0.9
0°C (32°F)	1.0
-21°C (-4°F)	10.0

### CONSTANT RESISTANCE PERFORMANCE Typical Service

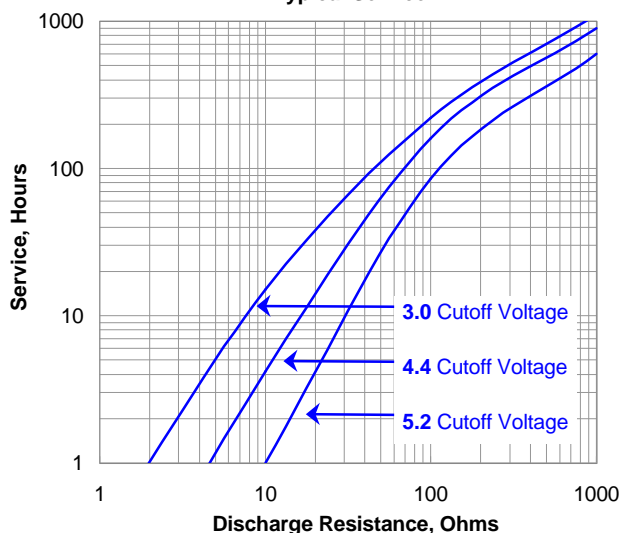

### CONSTANT CURRENT DISCHARGE Typical Service

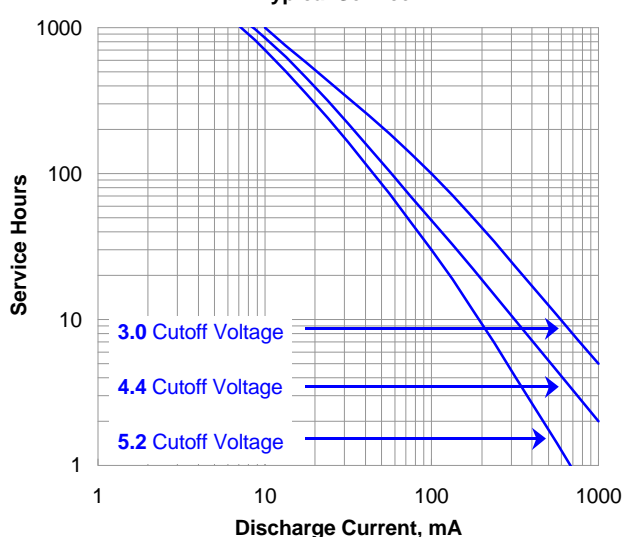

### Important Notice





This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved

## ENERGIZER NO. EV190

### Typical Applications

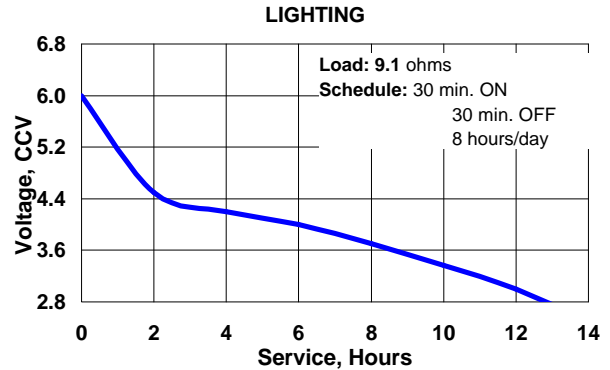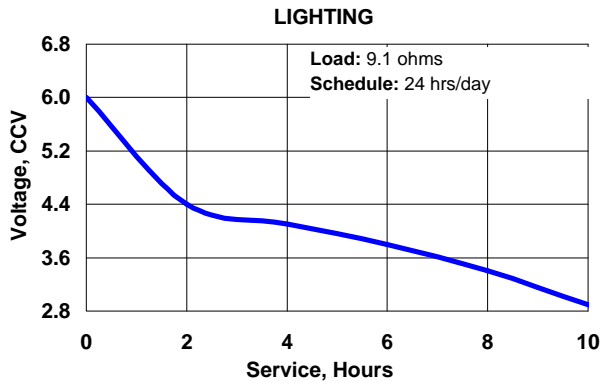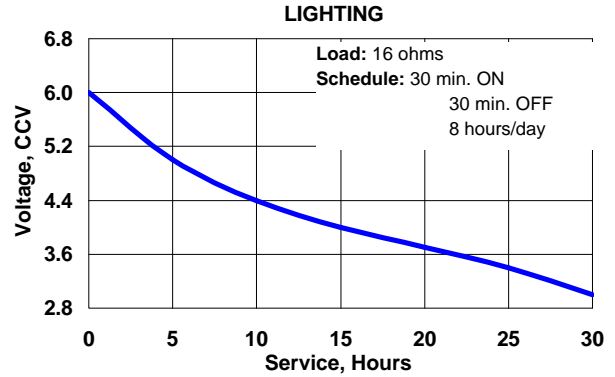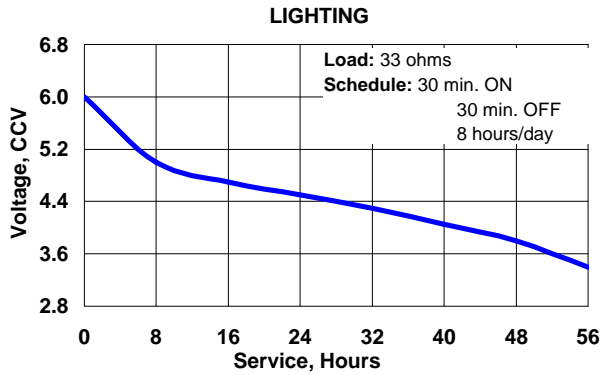

#### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved