

INTRINSICALLY SAFE



- Approved by global agencies for intrinsically safe lights

IDENTIFIABLE



- Internationally approved orange safety color

WATERPROOF



- Meets IEC 60529 IPX7 standards – 1 m for 30 min

IMPACT RESISTANT



- Survives a 2 meter drop

ECONOMICAL



- Reduced battery consumption for cost savings
- 17 hour run time

MS2ALED

European Region

Approved by global safety agencies, the MS2ALED is ideal for work in harsh conditions. The light is waterproof, dustproof and survives a 2 meter drop test.

A built-in carabiner belt clip allows quick access and the compact size fits easily in any toolbox. Internationally approved, the safety orange color provides instant recognition. The White LED lamp supplies steady, bright illumination.



- UL/CUL intrinsic safety for hazardous locations Class I Div. 1 Groups A,B,C, & D, Class II Div. 1 Groups E,F,&G, and Class III Div. 1; T4.
- MSHA for methane-air mixtures.
- ATEX intrinsically safe flashlight for IM2/II1G EEx ia I/IIC T4
- IECEx intrinsically safe flashlight for Ex ia IIC T4
- -20°C to 40°C ambient operating range.
- 0539
- EN60529 ingress protection level IP67.
- DEMKO 07 ATEX 0618226

Before Using Your Flashlight:


Please read all instructions and cautionary markings on the package and light

European Region

Product Detail:

- Designation:** Energizer 2AA ATEX
- Model:** MS2ALED
- Color:** Safety Orange and Black
- Power Source:** Two "AA"
- ANSI/NEDA:** 15 Series
- Lamp:** Three White Nichia GS LEDs
- Lamp Output Rating:** 30 Lumens
- Runtime:** 17 Hours
- Durability:** Survives 2 meter drop
- Typical Weight:** 66 grams (without batteries)
- Dimensions (mm):** 151.6 x 35.1 x 40.6

Performance:

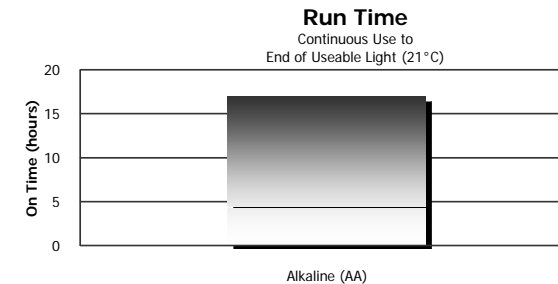

Important Notice

This datasheet contains information specific to products manufactured at the time of its publication

Contents herein do not constitute a warranty
©Energizer / All Rights Reserved