


ENERGIZER 3-0316



Industry Standard Dimensions

mm (inches)

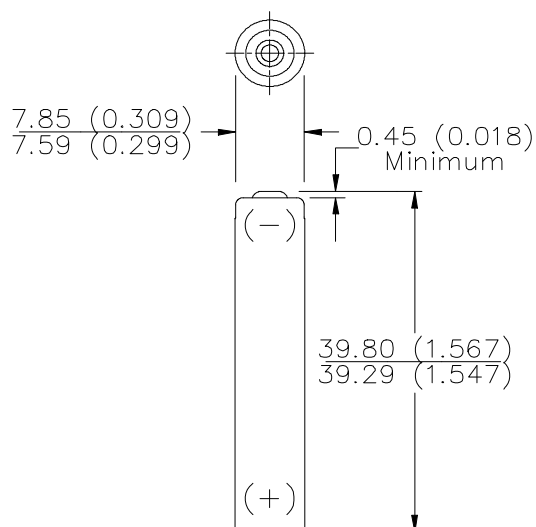

Chemical System: Alkaline
Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Battery Voltage: 1.5 Volts


Average Capacity: 625 mAh (to 0.8 volts)
(Rated capacity at 25 mA continuous drain.)

Average Weight: 6.2 grams (0.1 oz.)


Volume: 1.9 cubic centimeters (0.1 cubic inch)

Jacket: None


TEMPERATURE EFFECTS Typical Service to 0.8 Volts

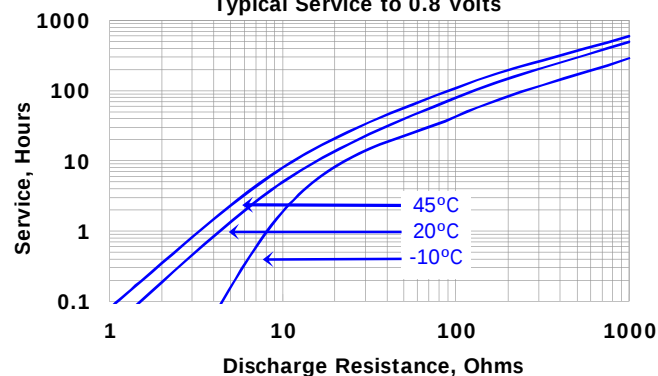

CONSTANT RESISTANCE PERFORMANCE Typical Service

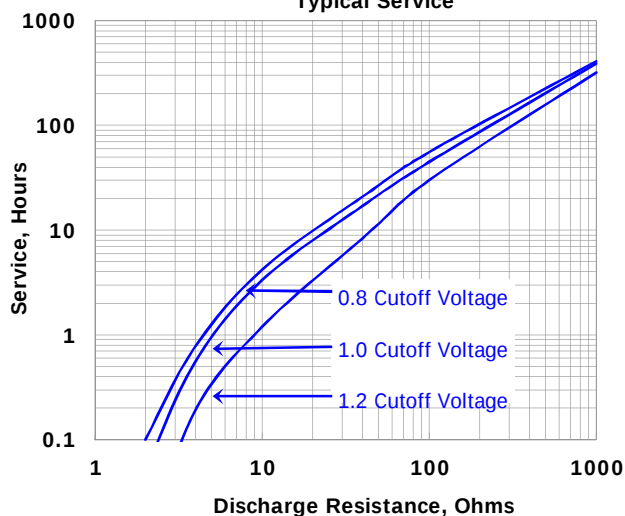

CONSTANT CURRENT DISCHARGE Typical Service

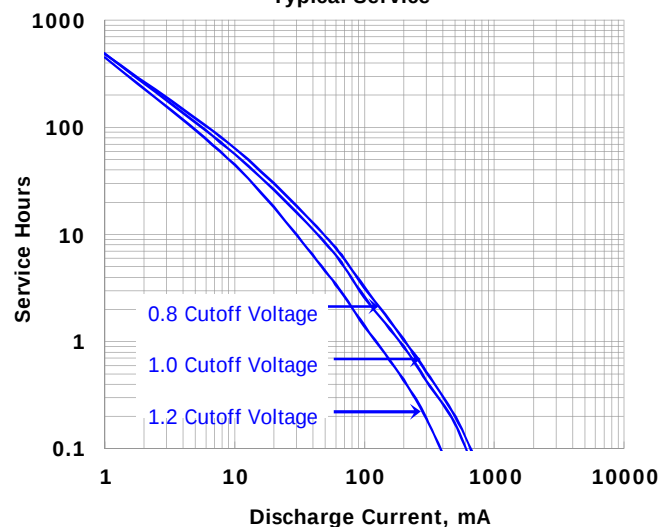


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.




Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER 3-0316

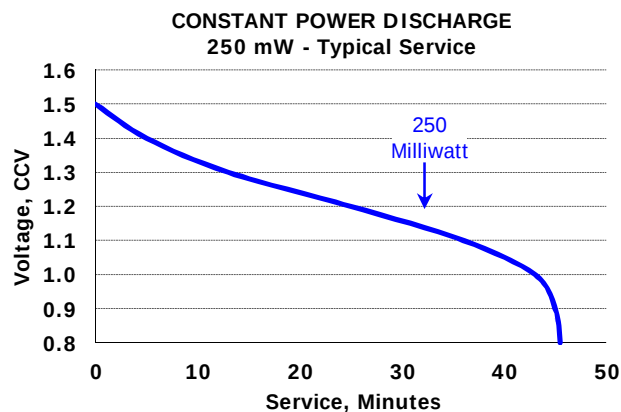

Industry Standard Tests (21° C)

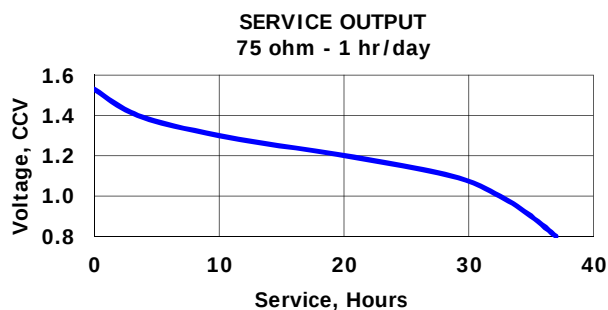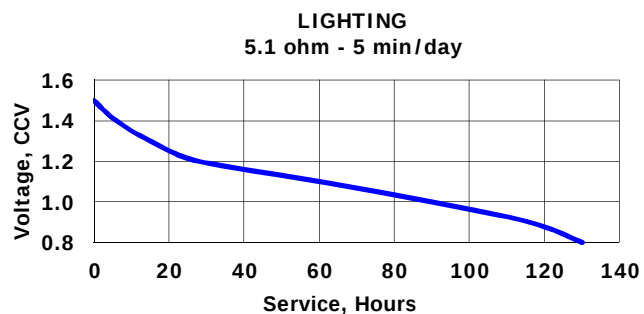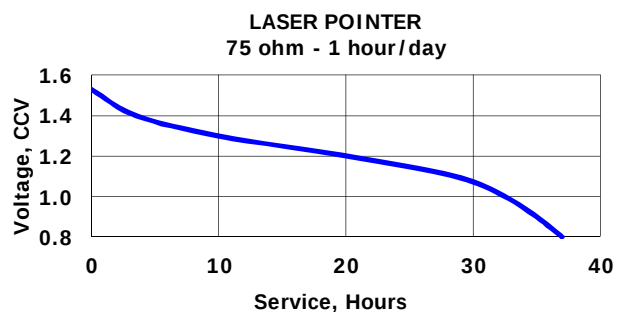

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved