


ENERGIZER 3-312




Typical Dimensions

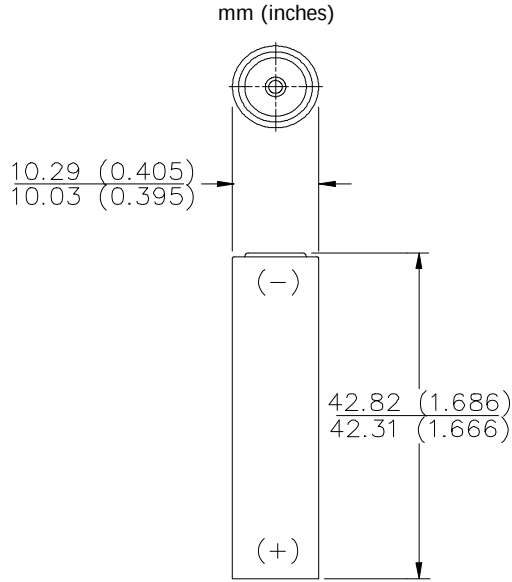


Chemical System: Alkaline
Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Battery Voltage: 1.5 Volts
Operating Temp: -18°C to 55°C (0°F to 130°F)
Average Capacity: 1,250 mAh (to 0.8 volts)
(Rated capacity at 25 mA continuous drain.)
Average Weight: 11.5 grams (0.4 oz.)
Volume: 3.8 cubic centimeters (0.2 cubic inch)
Jacket: None


TEMPERATURE EFFECTS Typical Service to 0.8 Volts

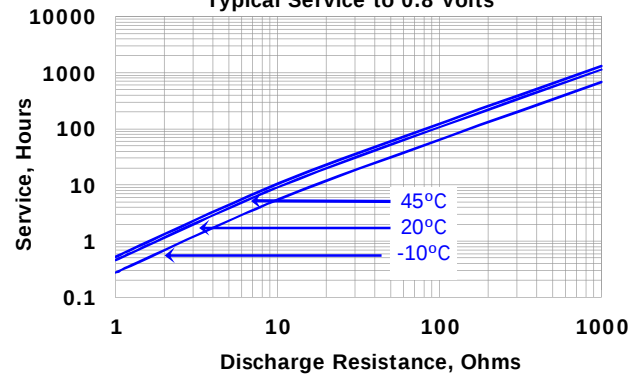

CONSTANT RESISTANCE PERFORMANCE Typical Service

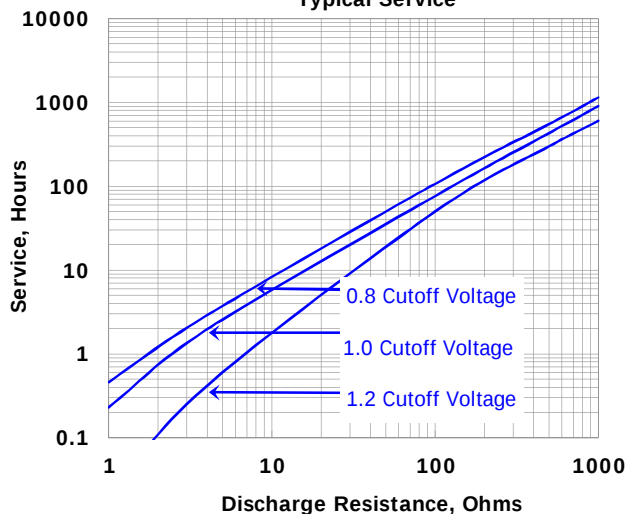

CONSTANT CURRENT DISCHARGE Typical Service

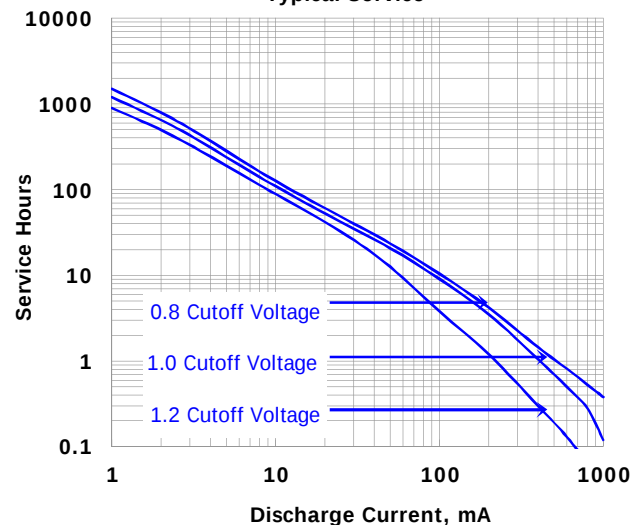

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.


Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER 3-312

CONSTANT POWER DISCHARGE
Typical Service

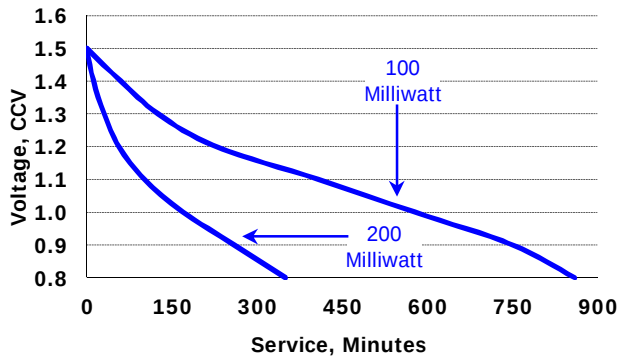


CONSTANT POWER DISCHARGE
Typical Service

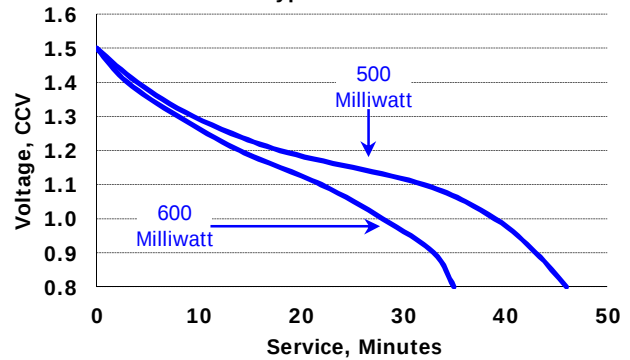


Industry Standard Tests (21° C)


LIGHTING
5.1 ohm - 4 min/hr 8 hr/day

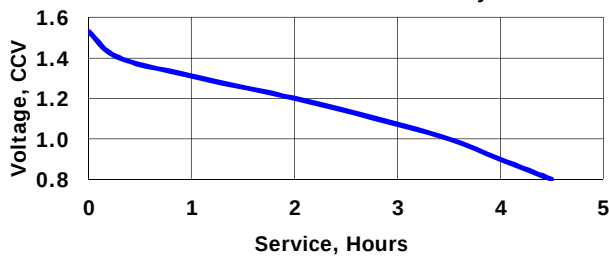


PAGER
1.2/120 mA - 10 sec/hr 24 hrs

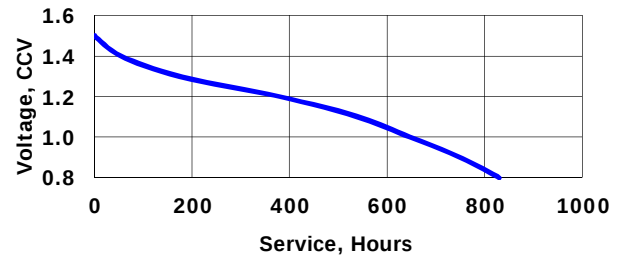


REMOTE
24 ohm - 15 spm - 8 hr/day

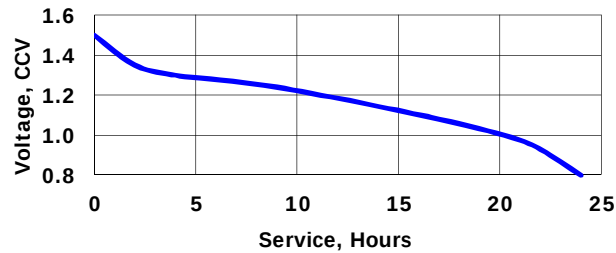

TAPE - ELECTRONIC GAMES
10 ohm - 1 hr/day

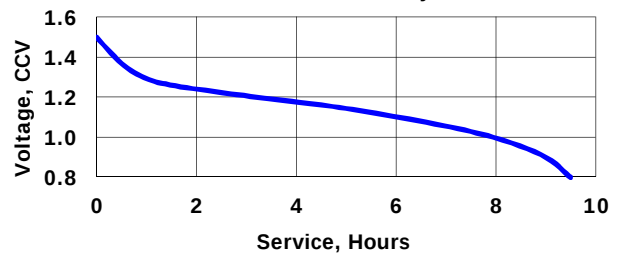

PHOTOFLASH
600 mA - 10 sec/min 1 hr/day

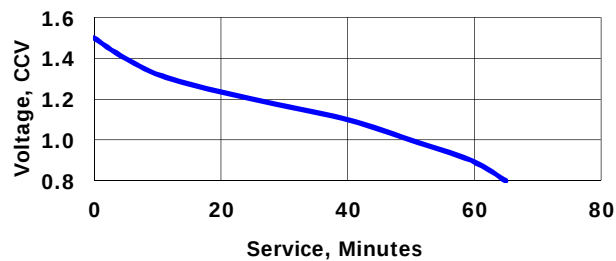

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved