


## ENERGIZER 392/384

## ZERO MERCURY

## SILVER OXIDE



### Industry Standard Dimensions

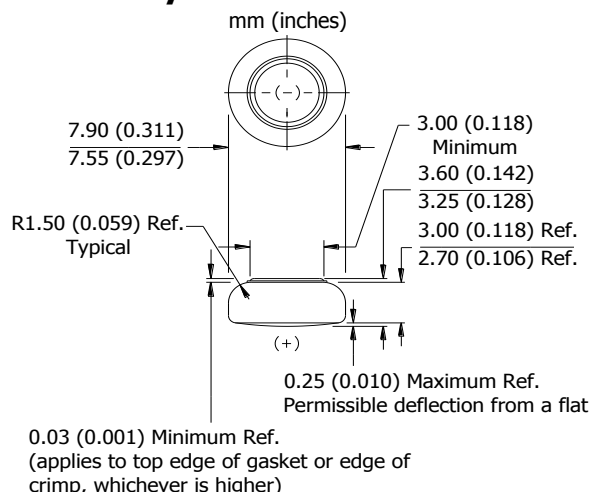


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

### Specifications

|                           |                                           |
|---------------------------|-------------------------------------------|
| <b>Chemical System:</b>   | Silver Oxide (Zn/Ag <sub>2</sub> O)       |
| <b>Designation:</b>       | ANSI-1135SO/1134SO, IEC-SR41              |
| <b>Nominal Voltage:</b>   | 1.55 Volts                                |
| <b>Typical Capacity:</b>  | 44 mAh* (to 1.2 volts)                    |
| <b>Capacity Test:</b>     | 22K ohm continuous drain at 21°C          |
| <b>Typical Weight:</b>    | 0.58 grams (0.021 oz.)                    |
| <b>Typical Volume:</b>    | 0.18 cubic centimeters (0.011 cubic inch) |
| <b>Impedance (40 Hz):</b> | 15 to 30 ohms                             |

\* Varies according to the applied load, temperature, and cutoff voltage.


### Cross Section

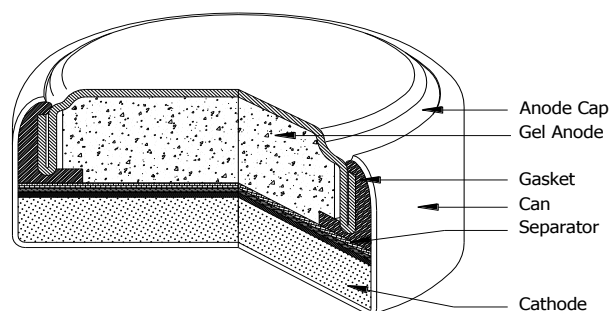

### Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @1.49V:**  
0.068 milliamperes  
**Load:** 22K ohm

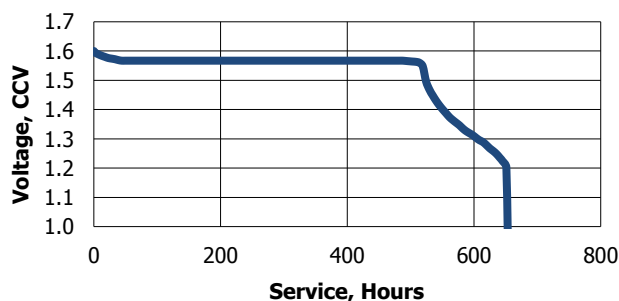


| <u>Schedule</u> | <u>Typical Drains</u><br>at 1.52V<br>(milliamperes) | <u>Load</u><br>(ohm) | <u>Cutoff</u><br>1.2V<br>(hours) |
|-----------------|-----------------------------------------------------|----------------------|----------------------------------|
| Continuous      | 0.068                                               | 22K                  | 650                              |


### Temperature Characteristics

Typical Performance at Low Discharge Rates

#### Service Effects

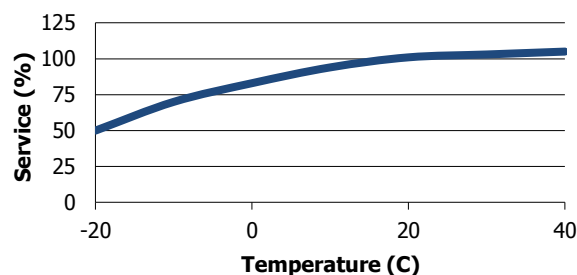

#### Storage Effects

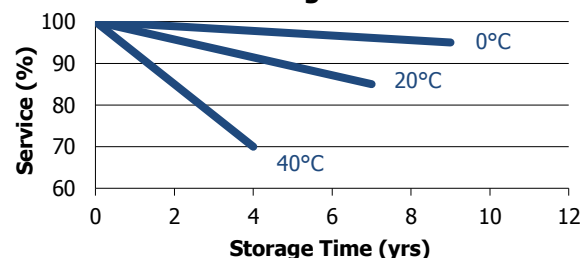

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.