



AAA



Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-24A, IEC-LR03
Nominal Voltage:	1.5 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	11.5 grams
Typical Volume:	3.8 cubic centimeters
Shelf Life:	10 years at 21°C
Terminal:	Flat Contact



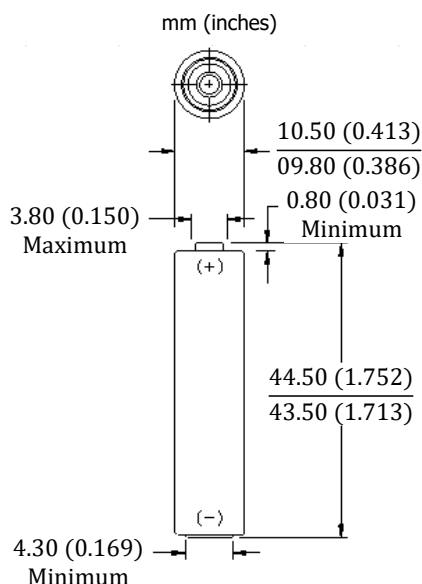


Continuous discharge to 0.8 volts at 21°C

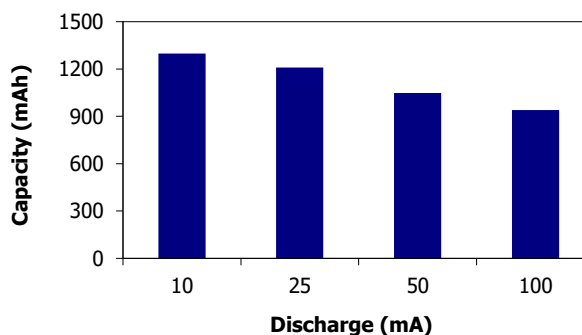

The graph displays the voltage drop over time for two different loads: Lighting (5.1 ohm LIF) and Toy (5.1 ohm 1 hr/day). The y-axis represents Voltage (CCV) from 0.9 to 1.5, and the x-axis represents Service (hours) from 0 to 5. The Lighting curve (red) drops more rapidly than the Toy curve (blue).

Service (hours)	Lighting Voltage (CCV)	Toy Voltage (CCV)
0	1.5	1.5
1	1.2	1.25
2	1.1	1.15
3	1.0	1.05
4	0.9	0.95

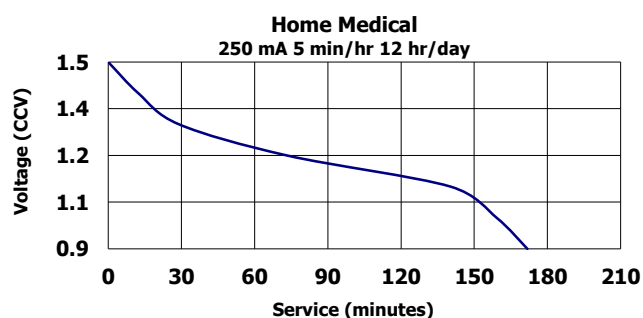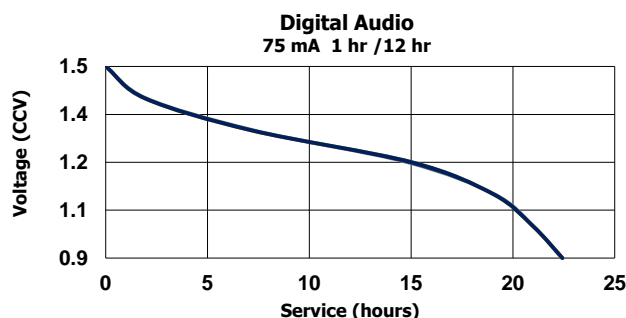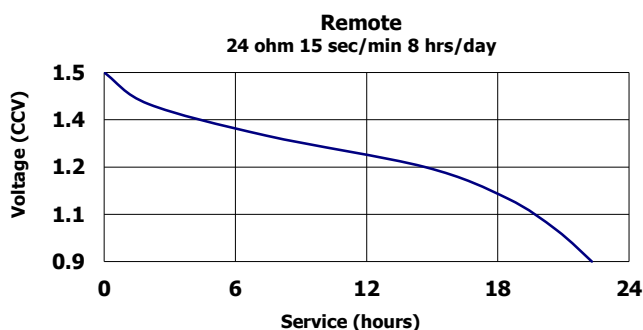

This data sheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.