


Eveready 123 Lithium Battery



Industry Standard Dimensions

mm (inches)

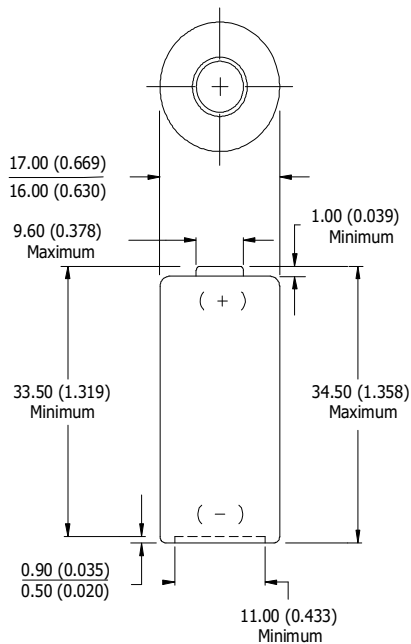

This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions.


General Information

Classification:	"Lithium"
Chemical System:	Lithium / Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI-5018LC, IEC-CR17345
Nominal Voltage:	3.0 Volts
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Typical Weight:	16.5 grams (0.58 oz.)
Typical Volume:	7.0 cubic centimeters (0.4 cubic inch)
Max Discharge:	1500 mA continuous (3500 mA pulse)
Max Rev Current:	2 uA

Industry Standard Tests (21°C)


Rated Capacity

100 ohms continuous to 2V

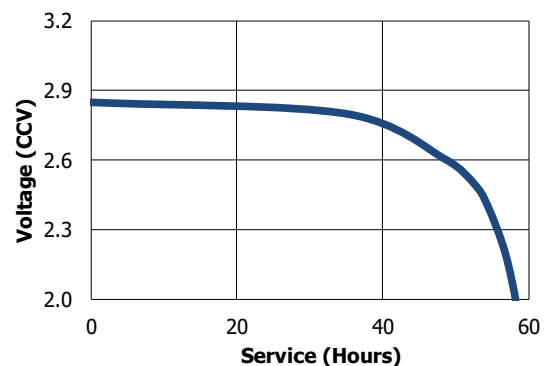


Portable Lighting

750mA 4min on, 11min off
8hrs per day to 1.8V

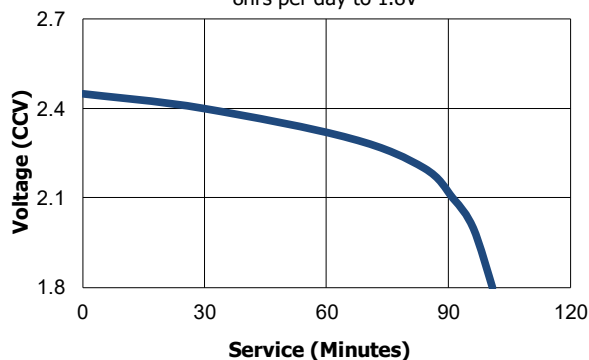

Photo

900mA 3sec on 27sec off
24hrs per day to 1.55V

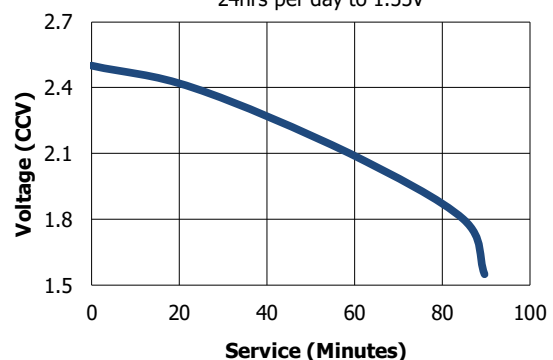

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

Contents herein do not constitute a warranty and are for reference only.