


EVEREADY CR2 Lithium Battery

(EL1CR2 / CR2)



Industry Standard Dimensions

mm (inches)


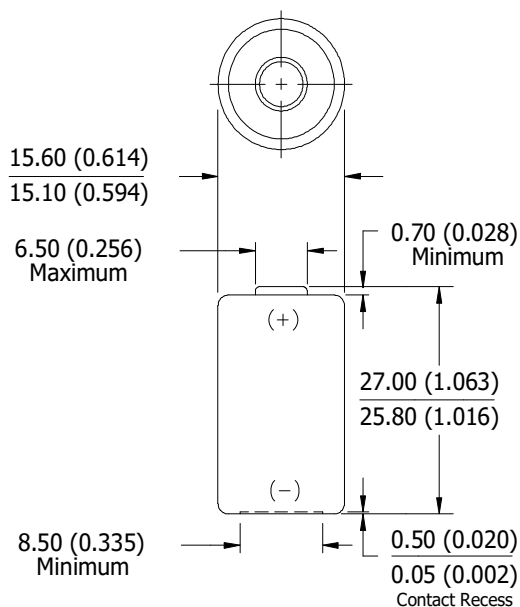


This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions.

General Information

Classification:	"Lithium"
Chemical System:	Lithium / Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI-5046LC, IEC-CR15H270
Nominal Voltage:	3.0 Volts
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Typical Weight:	11.0 grams (0.4 oz.)
Typical Volume:	5.2 cubic centimeters (0.3 cubic inch)
Max Discharge:	800 mA continuous (1500 mA pulse)
Max Rev Current:	2 uA

Industry Standard Tests (21°C)

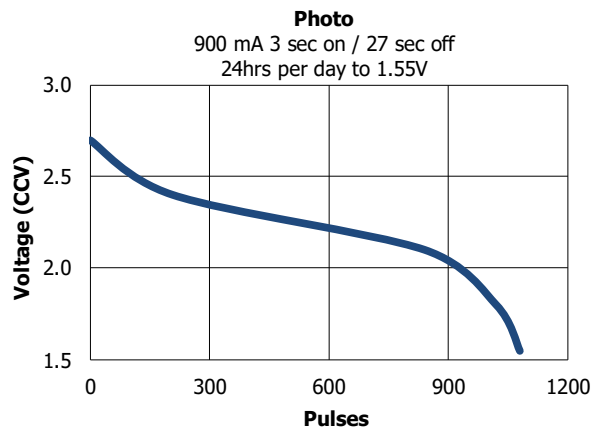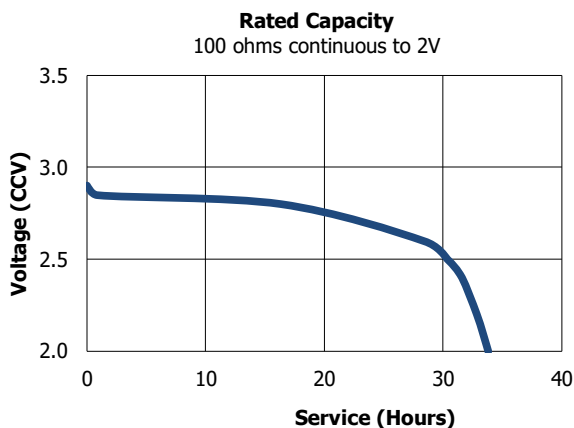

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.