ENERGIZER L91


Ultimate Lithium

AA



Industry Standard Dimensions

mm (inches)

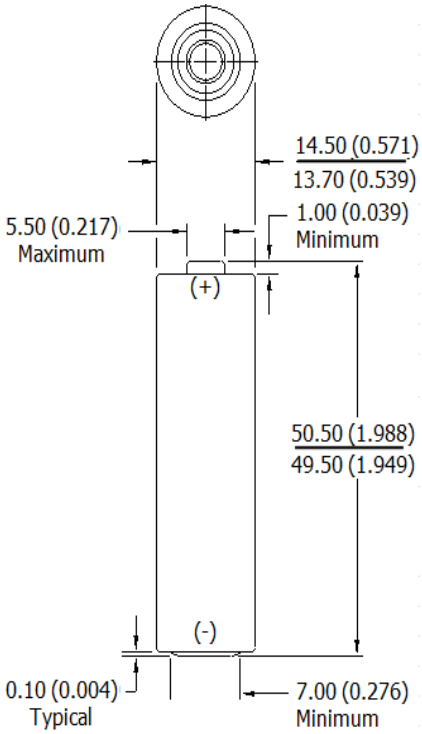

General Information

Classification:	"Cylindrical Primary Lithium"
Chemical System:	Lithium/Iron Disulfide (Li/FeS_2)
Designation:	ANSI 15-LF, IEC-FR14505 (FR6)
Nominal Voltage:	1.5 Volts
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)*
Typical Weight:	15 grams (0.5 oz.)
Typical Volume:	8.0 cubic centimeters (0.49 cubic inch)
Max Discharge:	2.5 amps continuous
(single battery only)	4.0 amps pulse (2 sec on / 8 sec off)
Lithium Content:	Less than 1 gram
Typical IR:	120 to 300 milliohms (depending on method)
Shelf Life:	25 years at 21°C
Certifications:	


This battery has Underwriters Laboratories component recognition (MH29980)

II 1G
Ex ia IIC T3 Ga
Baseefa 14ATEX0107U
(If specially marked)

***All data shown tested at 21°C unless otherwise stated.**


Milliamp-Hours Capacity


Constant Current Discharge to 0.8 Volts

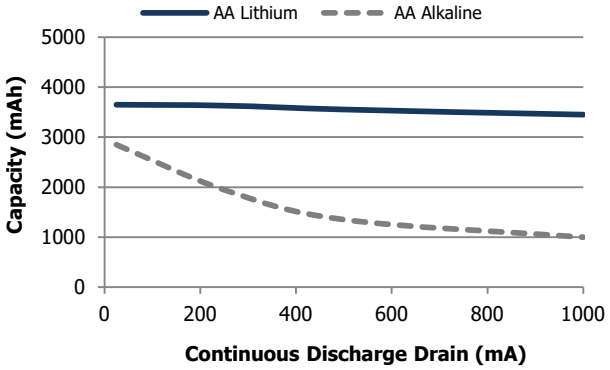



(alkaline shown for comparison)

Industry Standard Tests

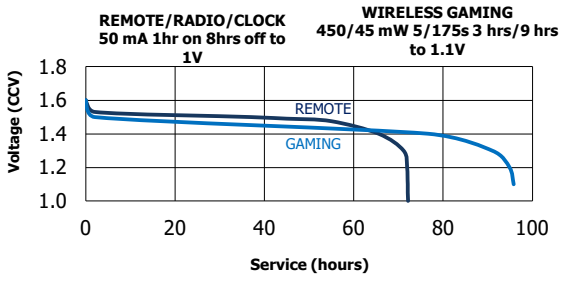

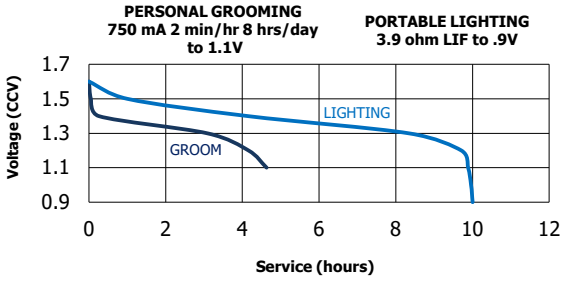

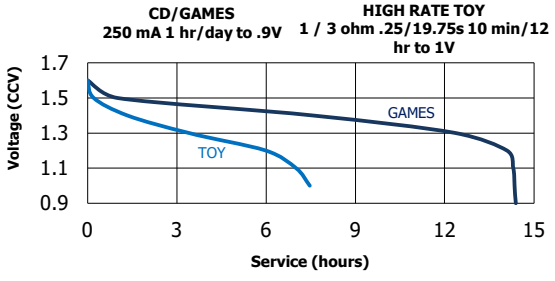

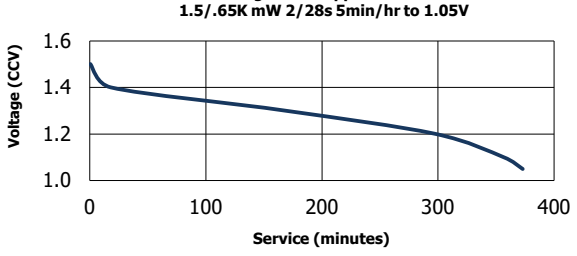

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.