

ENERGIZER HS6570

4.5V




Specifications

NOT INTENDED FOR RETAIL TRADE


Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-3LR90, IEC-3LR20
Nominal Voltage:	4.5 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	368.5 grams (13.0 oz.)
Typical Volume:	300 cubic centimeters (18.4 cubic inch)
Jacket:	Cardboard
Cells:	Three 3-350 in series
Terminal:	Screw Post

Simulated Application Tests (21°C)

TYPICAL DISCHARGE
1K ohm continuous

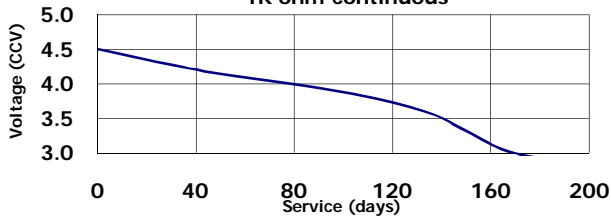


TYPICAL DISCHARGE
125 ohm 4 hrs/day

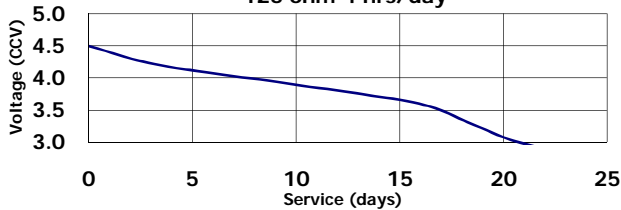


Milliamp-Hours Capacity

Continuous discharge to 2.4 volts at 21°C

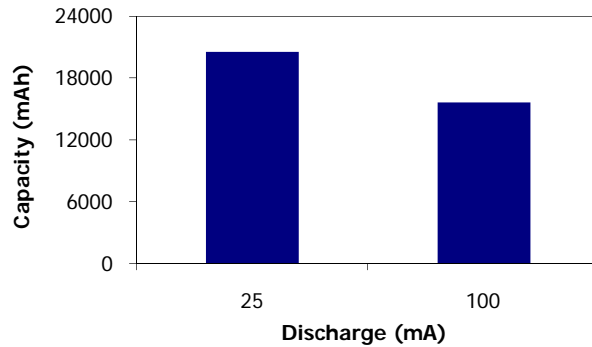

Industry Standard Dimensions

mm (inches)

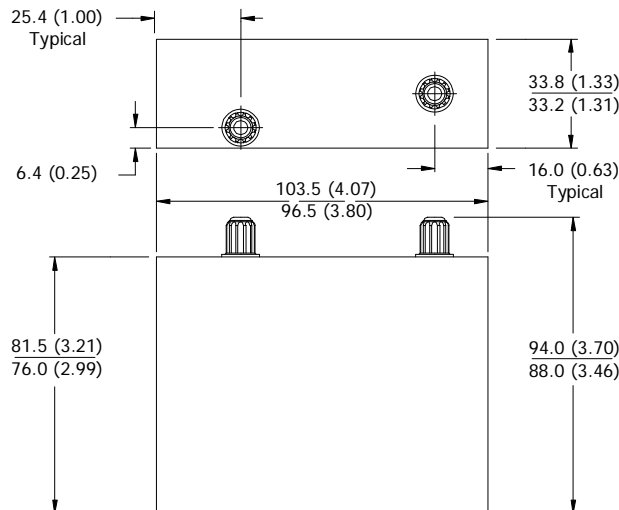

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.