

## Rapide Charger

**European Region**  
 Download Instructions (multilingual)  
[Page 01](#) | [Page 02](#) | [Page 03](#)

### HI-TECH

- Red and Green LEDs for each pair of batteries show charging status and alert for bad batteries




### CONVENIENT

- Charge 2 or 4 AA or AAA batteries at the same time



### ADVANCED

- Two Stage Charge
- Primary Battery Detection

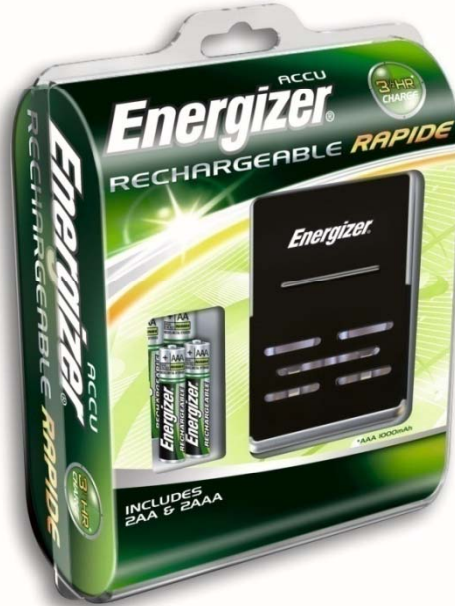

### Product Detail:

**Designation:** Rapide Charger

**Color:** Black and Silver

**Charging Current:** 2 or 4 "AA" 600mA  
 2 or 4 "AAA" 350mA

**Slow Charge:** "AA" 350mA  
 "AAA" 175mA

**Trickle Charge:** 0-70mA

Battery (NiMH)	Capacity (mAh)	Estimated (time)
AA	2500-2650	5.0-5.3 hrs
AA	1300-2400	2.6-4.8 hrs
AAA	850-1000	2.9-3.4 hrs

**Shutoff Mechanism:** Delta V and Temperature Detection and Timer Control

Delta V Detection 0-15mV per channel (2 cells)

Temp. Detection 41-45°C

Max Timer Control 2 or 4 "AA" 6 hours  
 2 or 4 "AA" 3.5 hours

**Charger Input :** 100-240V AC 50/60Hz

**Weight (charger):** 138.8 grams

**Dimensions (mm):** 34.7 x 112.0 x 69.5 (H x L x W)

**Safety Features:** Delta V Charging Cut Off  
 Short Circuit and Reverse Polarity Protection  
 Safety Timer to Prevent Over Charge  
 Primary and Bad Battery Detection

**NOTE:** Batteries must be charged in pairs.

**Before Using Your Charger:**  
 Please read all instructions and cautionary markings on the battery charger, batteries, and device.

### Important Notice

This datasheet contains information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc.

**Contents herein do not constitute a warranty.**