
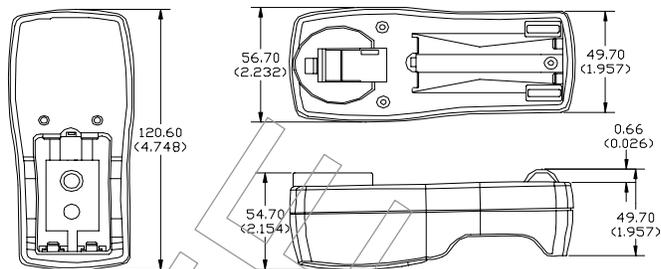


ENERGIZER CHM39

Battery Charger

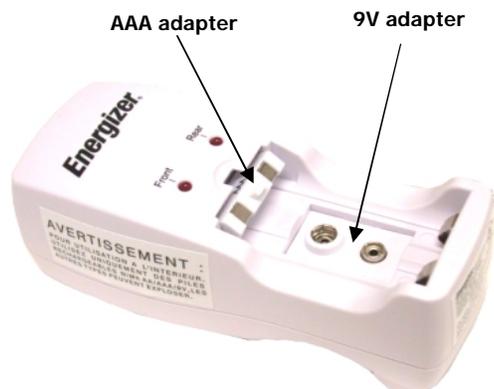

Dimensions in mm (inches)

Features:

1. Digital camera power kit design.
2. Versatile and compact design.
3. Charges AA, AAA, and 9V NiMH batteries.
4. Illuminated LED's indicate charging.

Charging Instructions:

1. Charge two or four AA or AAA and one 9V NiMH batteries. AA and AAA Batteries are charged in pairs. When charging only two batteries use same bay.
2. AA - Raise holder tab to accept AA size batteries.
AAA - Lower holder tab to accept AAA size batteries.
9V - Raise holder tab to clearly accept 9V size batteries.
3. Lift the plug until it snaps into horizontal position and plug in standard AC outlet.
4. When the batteries are charging, the LED indicator will light. Left light is for the front bay and the right light is for the back bay. Lights go off when charging is done.
5. It is normal for the batteries to become warm when charging.
6. Charge rechargeable NiMH batteries only.

Product Detail:

Designation: Hi-Energy Battery Charger

Color: White

Charge Capability: Two or Four "AA" NiMH Batteries
Two or Four "AAA" NiMH Batteries
One "9V" NiMH Batteries

Charging Output: 170 mA x 2(AA)
80 mA x 2(AAA)
23 mA x 1(9V)

Charging Time: 14 hours

Typical Weight: 222.0 grams (8.0 oz.)

Dimensions (mm): 120.60 x 54.70 x 56.70

Important Safety Instructions:

For indoor use only. Never use an extension cord or attachment not recommended by Energizer. As this may result in fire, electrical shock or injury.

Do not operate charger if it has been subjected to shock or damage, and do not disassemble the charger. Always unplug the charger from outlet before attempting any maintenance or cleaning.

Never alter the plug provided, and do not use as a power source for any electrical equipment. This charger is not intended for use by young children or infirm persons without supervision.

Young children should be supervised to ensure they do not play with the charger.

Important Notice

This data sheet contains information specific to battery chargers manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty