




## Engineering Data

**LeClanche 9V**  
**Industrial General Purpose**  
 No Added Mercury or Cadmium  
**NOT INTENDED FOR RETAIL TRADE**


### EVEREADY NO. EV22

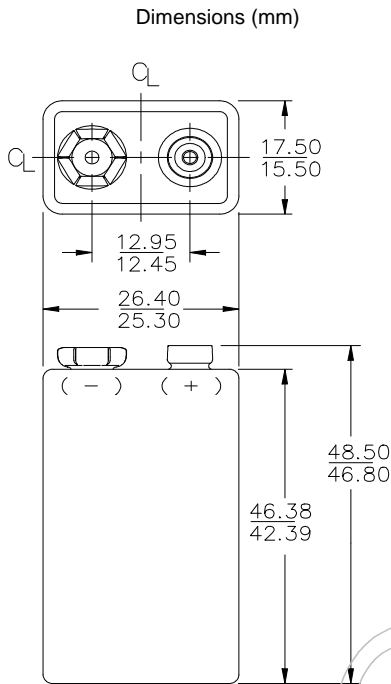


Millimeters	Inches
12.45	0.490
12.95	0.510
15.50	0.610
17.50	0.689
25.30	0.996
26.40	1.039
42.39	1.669
46.38	1.826
46.80	1.843
48.50	1.909

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
**Designation:** ANSI-1604D, IEC-6F22  
**Battery Voltage:** 9 Volts  
**Average Weight:** 36 grams (1.27 oz.)  
**Volume:** 22.4 cubic centimeters (1.37 cubic inch)  
**Cells:** Six No. 118P in series  
**Jacket:** Metal


TEMPERATURE EFFECTS  
 Typical Service to 4.8 volts

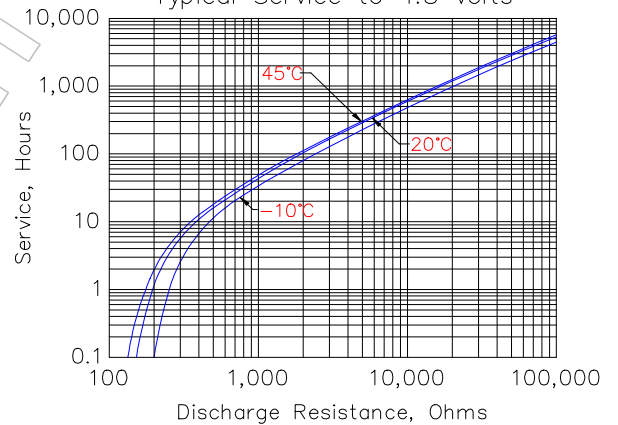





CONSTANT RESISTANCE PERFORMANCE  
 Typical Service

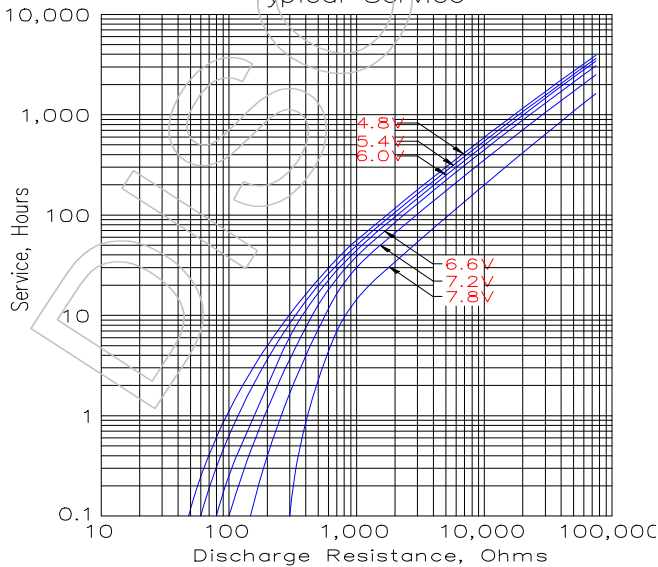

CONSTANT CURRENT PERFORMANCE  
 Typical Service

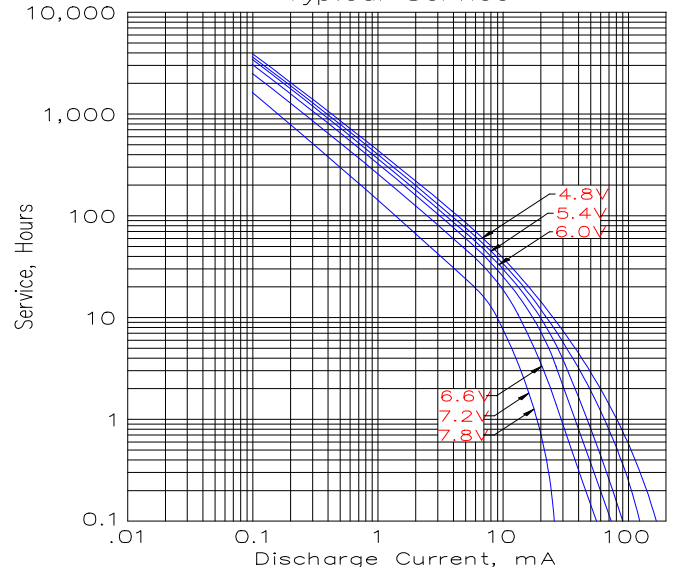

## Typical Applications

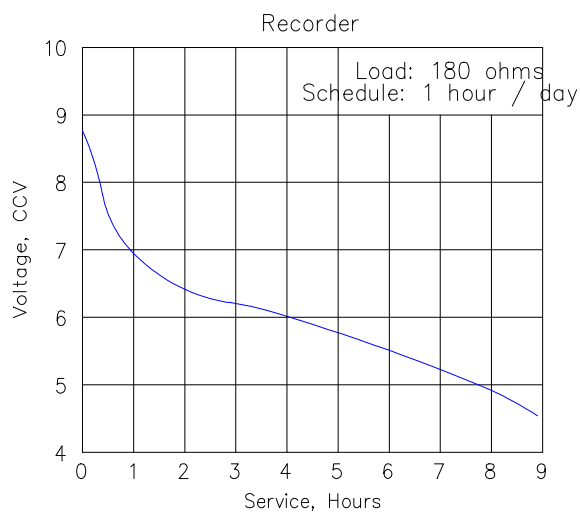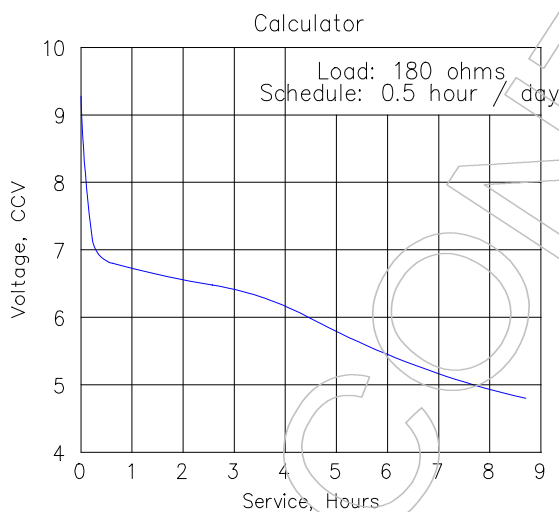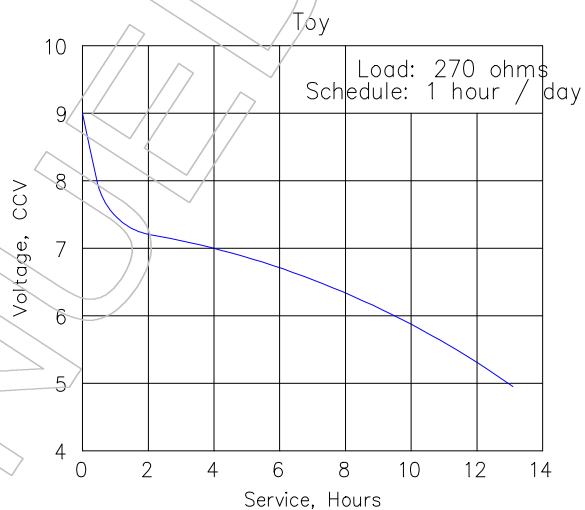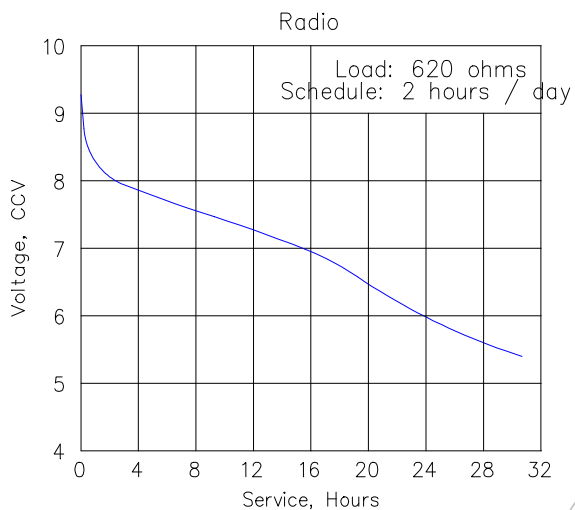

### Important Notice

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.